

avenlur

Indoor Hawthorn 93in by Avenlur



WARNING:

Adult assembly required.

Need Help?

CALL US AT 888.697.3931 / M-F 9AM - 5PM PT (12PM - -8PM ET)

OR EMAIL US AT INFO@AVENLUR.COM

WARNING

Adult assembly required.

WARNING

Maximum user weight: 110 lbs (50kg) per child.

WARNING

CHOKING HAZARD:

Adult assembly required. Keep small assembly parts out of reach of children.

 Use under adult supervision.

OBSERVE ALL STATEMENTS AND WARNINGS TO REDUCE THE LIKELIHOOD OF SERIOUS OR FATAL INJURY. SAVE THIS SHEET FOR FUTURE REFERENCE.

OPERATION INSTRUCTIONS

1. An adult should always supervise use of this product by children of all ages.
2. Instruct children not to attach items to the playground equipment that are not specifically designed for use with the equipment (examples: ropes, clothesline, pet leashes, cables and chain, etc) as they may cause a strangulation hazard or any other hazard.
3. Never allow children to use the equipment in a manner other than intended.

MAINTENANCE INSTRUCTIONS

1. Inspect the product periodically for loose or damaged components. **Tighten bolts if need.**
2. Check all connections and bolts for tightness at least twice monthly during the usage.
3. Check all coverings and bolts for sharp edges.

INSTALLATION INSTRUCTIONS

Please have an electrical drill available for assembly if possible.

If you have difficulty in installation, please contact us for help and get installation video for reference.

Please Ensure:


1. You are assembling with at least two people to ensure that all sides and parts are leveled.
2. You don't screw the parts in too hard or it will splinter the wood.
3. You follow the directions carefully.

CONTACT US BEFORE ASSEMBLY IF:


- You need assistance with assembly
- You need a replacement part due to a missing part or defective part

Call us at 888-697-3931 M-F 9AM-5PM PT


or email us at info@avenlur.com



① ×1 93in




② ×1 93in




③ ×1 93in



④ ×1 93in



⑤ ×1 93in



⑥ ×1 93in



⑦ ×1 56in



⑧ ×12 27.2in



⑨ ×1 56in



⑩ ×1 29.7in



⑪ ×7 31.5in



⑫ ×1 31.5in



⑬ ×6 2.5in




⑭ ×2 31.5in




⑮ ×2 30in




⑯ ×2 11in




17 x1 31.5in




18 x1 31.5in




19 x3 30in



20 x1 30in



21 x1 30in



22 x1 30in



23 x2 30in



24 x1 30in



25 x1 30in




26 x1 30in



27 x9 31.5in




28 x1 30in

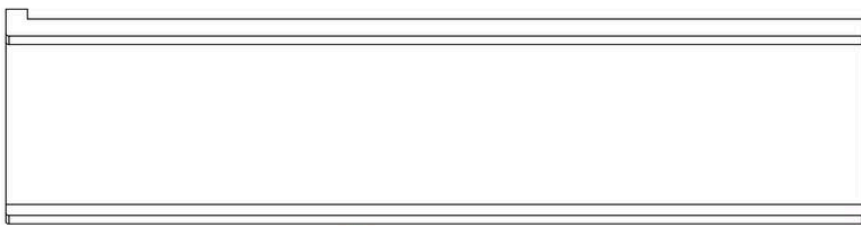


29 x1 55in



30 x1 30.5in



31 x1 14in



32 x1 14in




33 x9




34 x1 334.7in



35 x2 130in

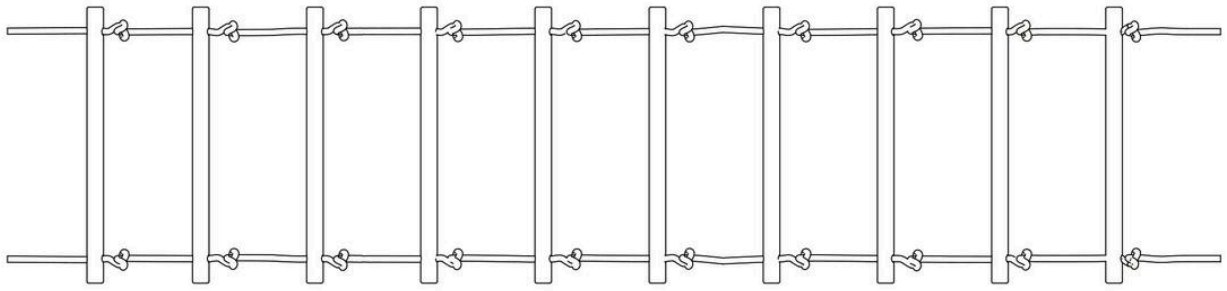

36 × 1

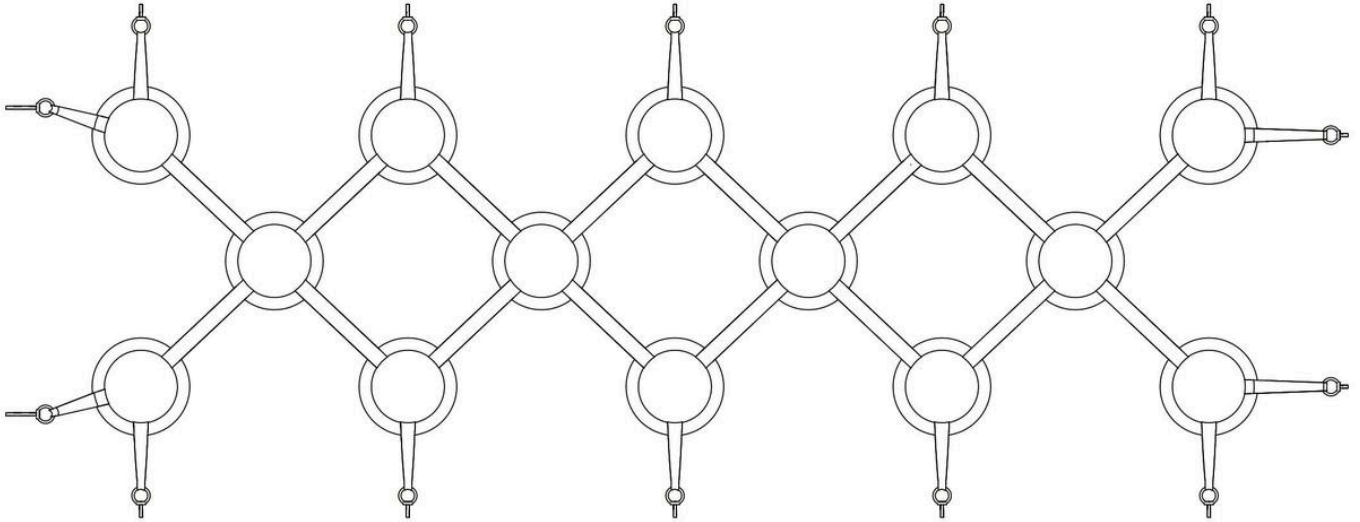

37 × 1




38 × 1




M6×25

A × 8




M4×50

B × 8




M7×40

C × 2



M7×70

D × 24



M6×60 M6×13

E × 8



M6×30 M6×25

F × 54



M6×45 M6×25

G × 32



M6×60 M6×25

H × 26



M6×85 M6×25

I × 14



M6×110 M6×25

J × 4



M6×25

K × 12



M6×15

L × 2



M10×35

M × 18



M6×80

N × 2



M10

O × 18



4mm

P × 2



8mm





Q × 1



17mm

R × 1

01-1

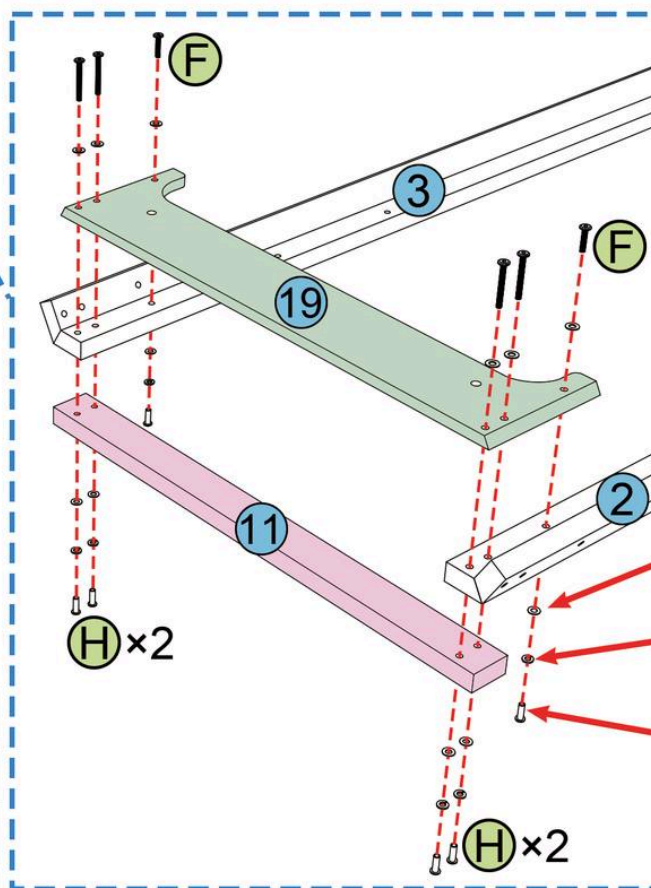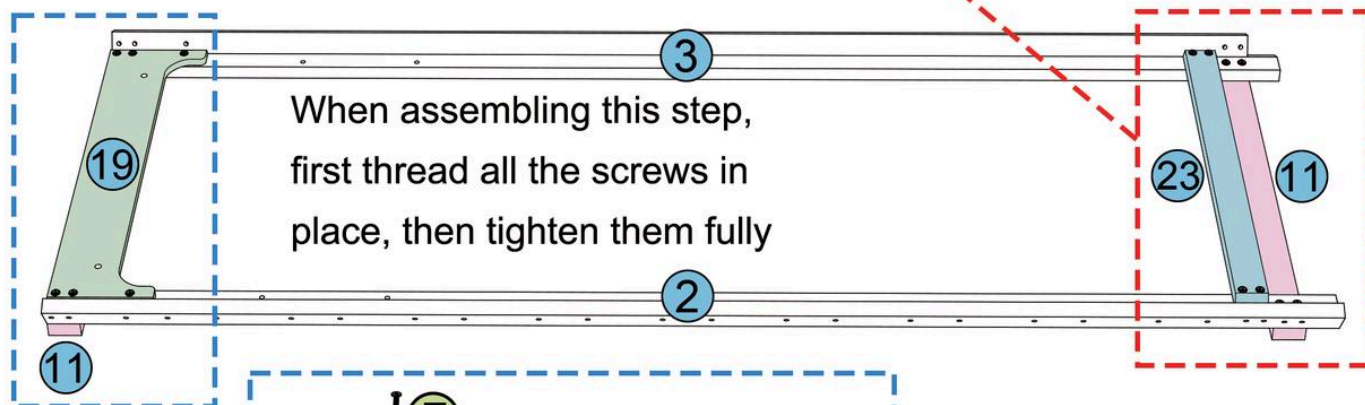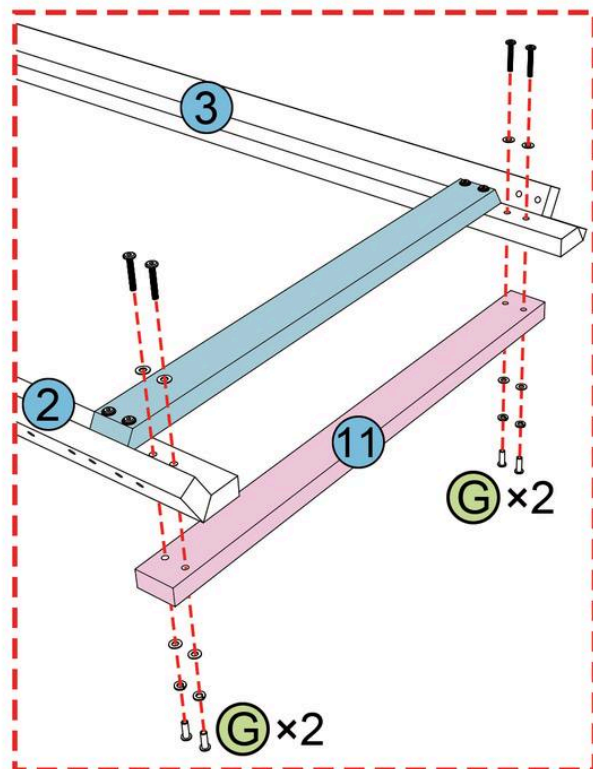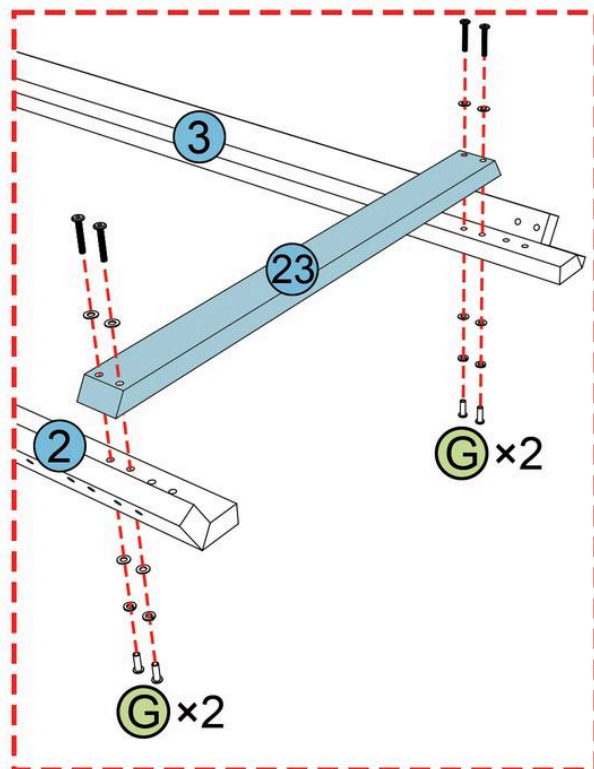

Please note that the spring washer shall be placed between the washer and the nut. This requirement applies to all subsequent assemblies involving spring washers.



washer






spring washer






nut


G		8
F		2
H		4
P		2

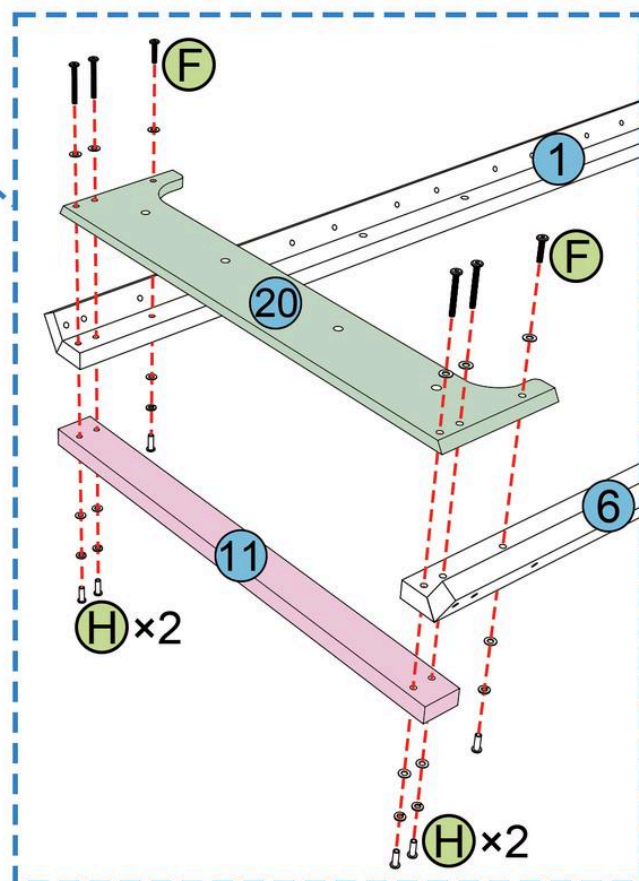
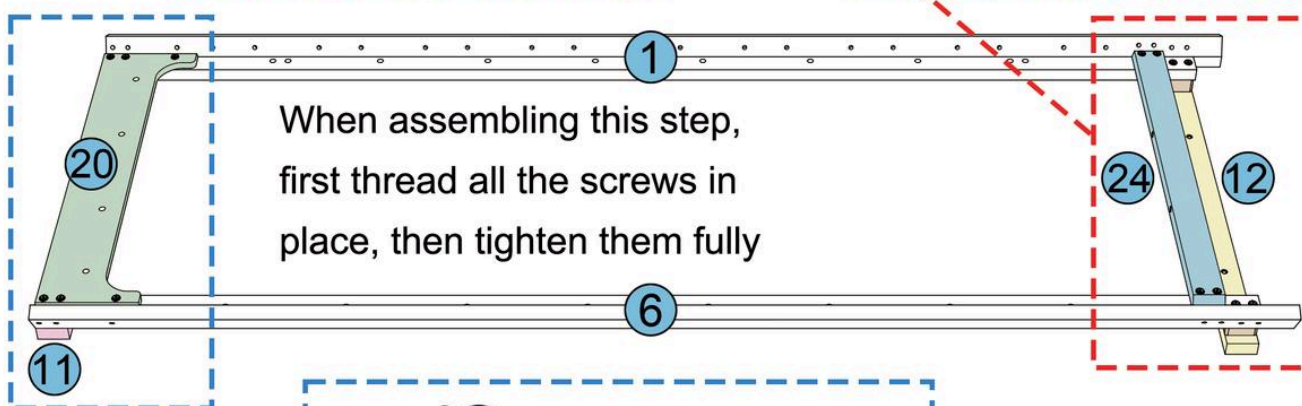
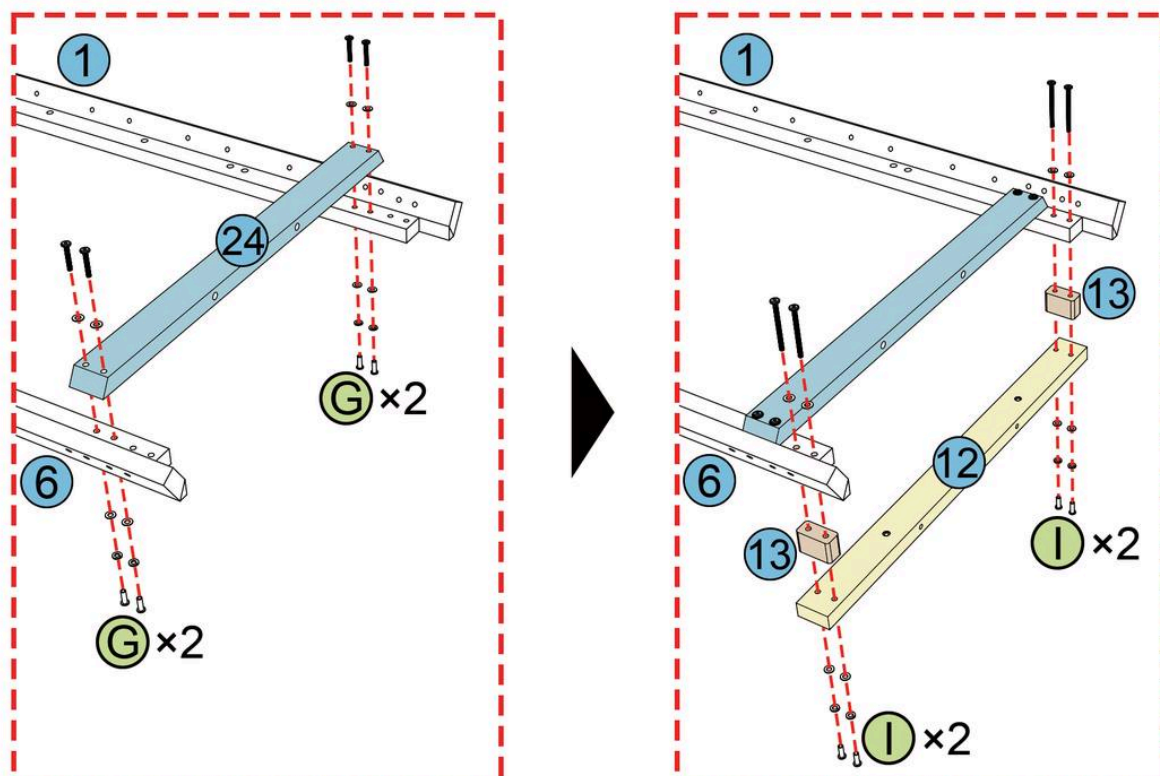


(G)	M6×45 M6×25	4
(I)	M6×85 M6×25	4
(F)	M6×30 M6×25	2
(H)	M6×60 M6×25	4
(P)	4mm	2

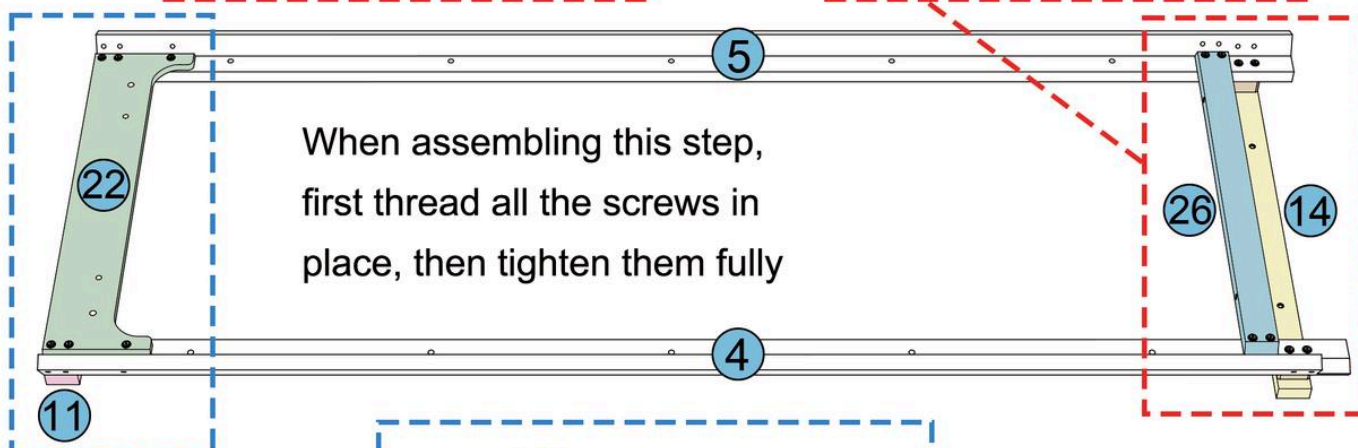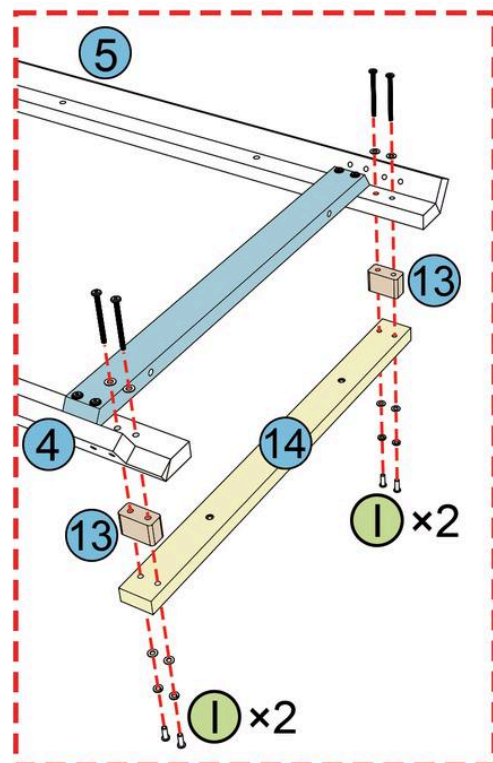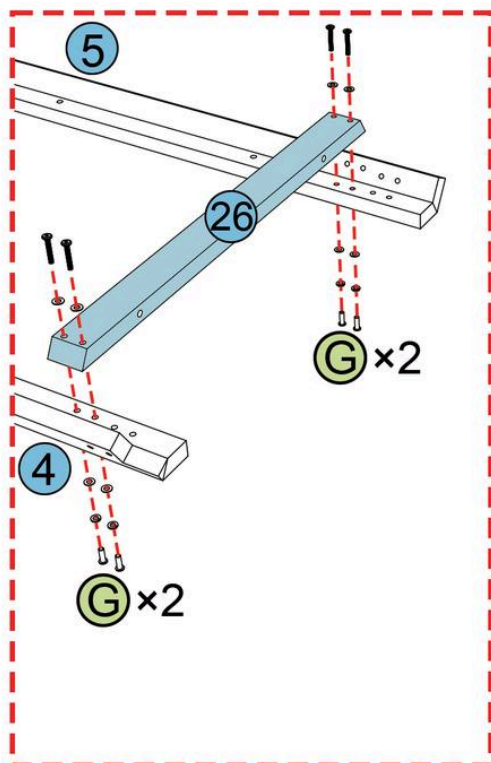

When assembling this step,
first thread all the screws in
place, then tighten them fully

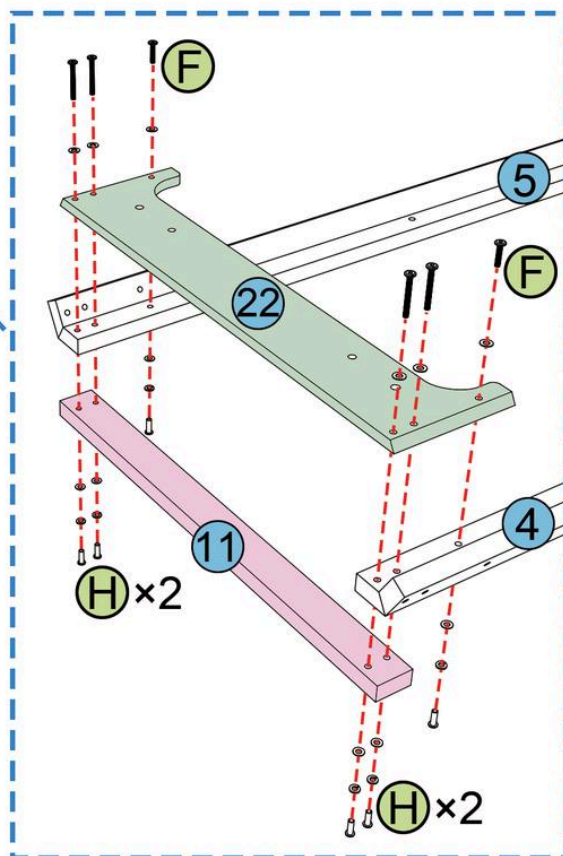


G		M6×45 M6×25	4
I		M6×85 M6×25	4
F		M6×30 M6×25	2
H		M6×60 M6×25	4
P		4mm	2


04-1

Part 25 needs to be the same angle and position as shown in the manual.


When assembling this step, first thread all the screws in place, then tighten them fully

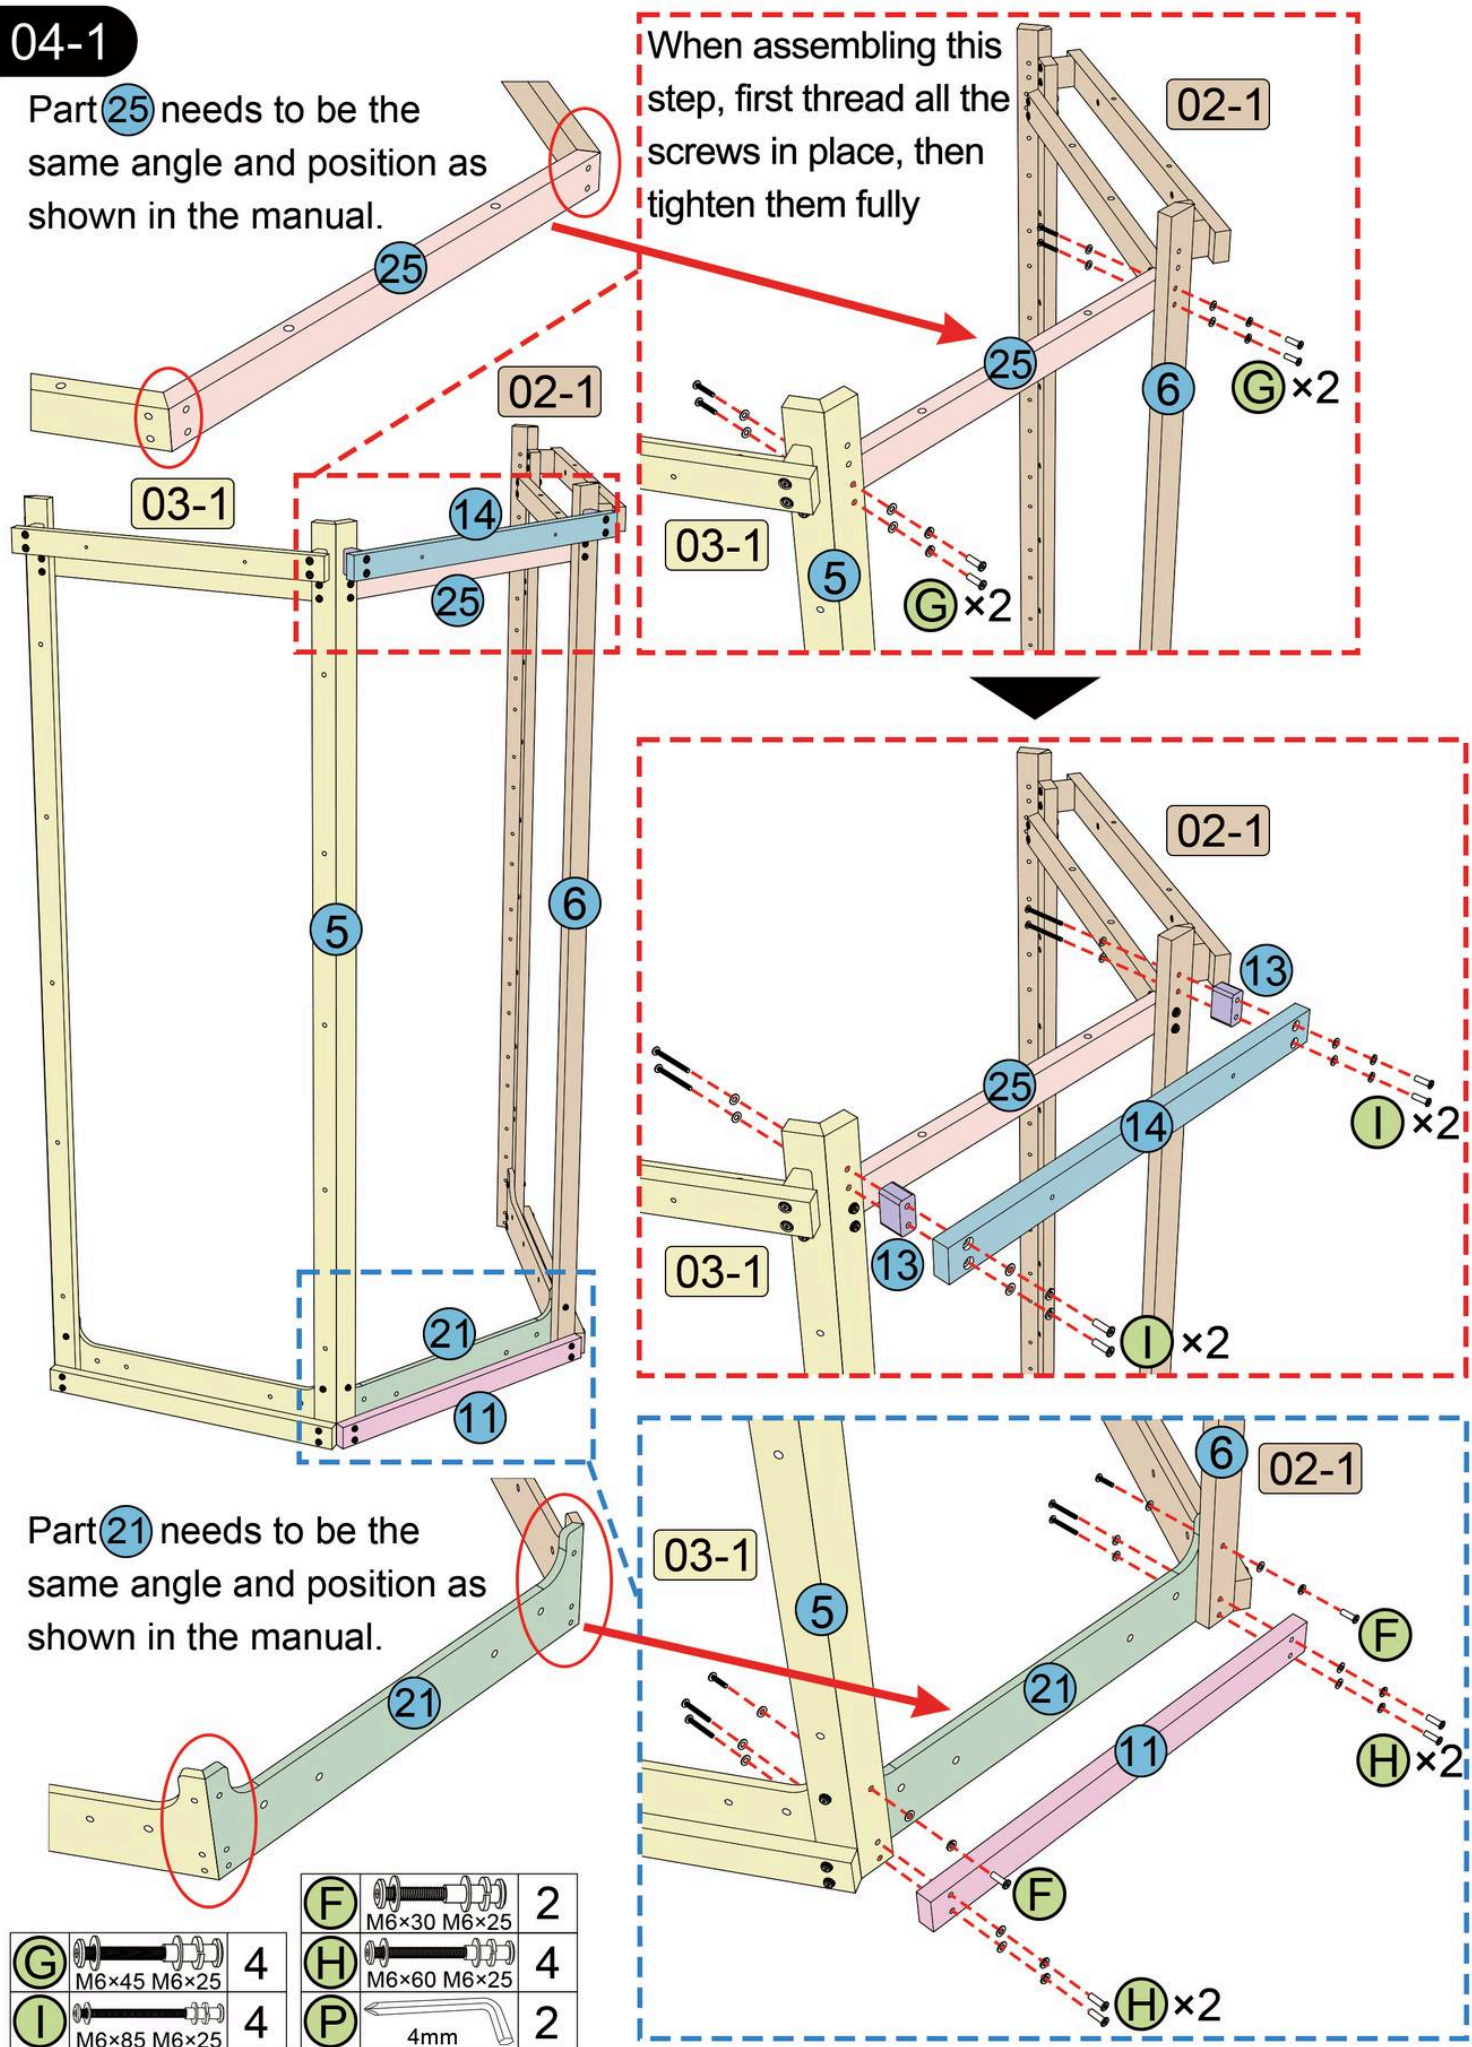

When assembling this step, first thread all the screws in place, then tighten them fully

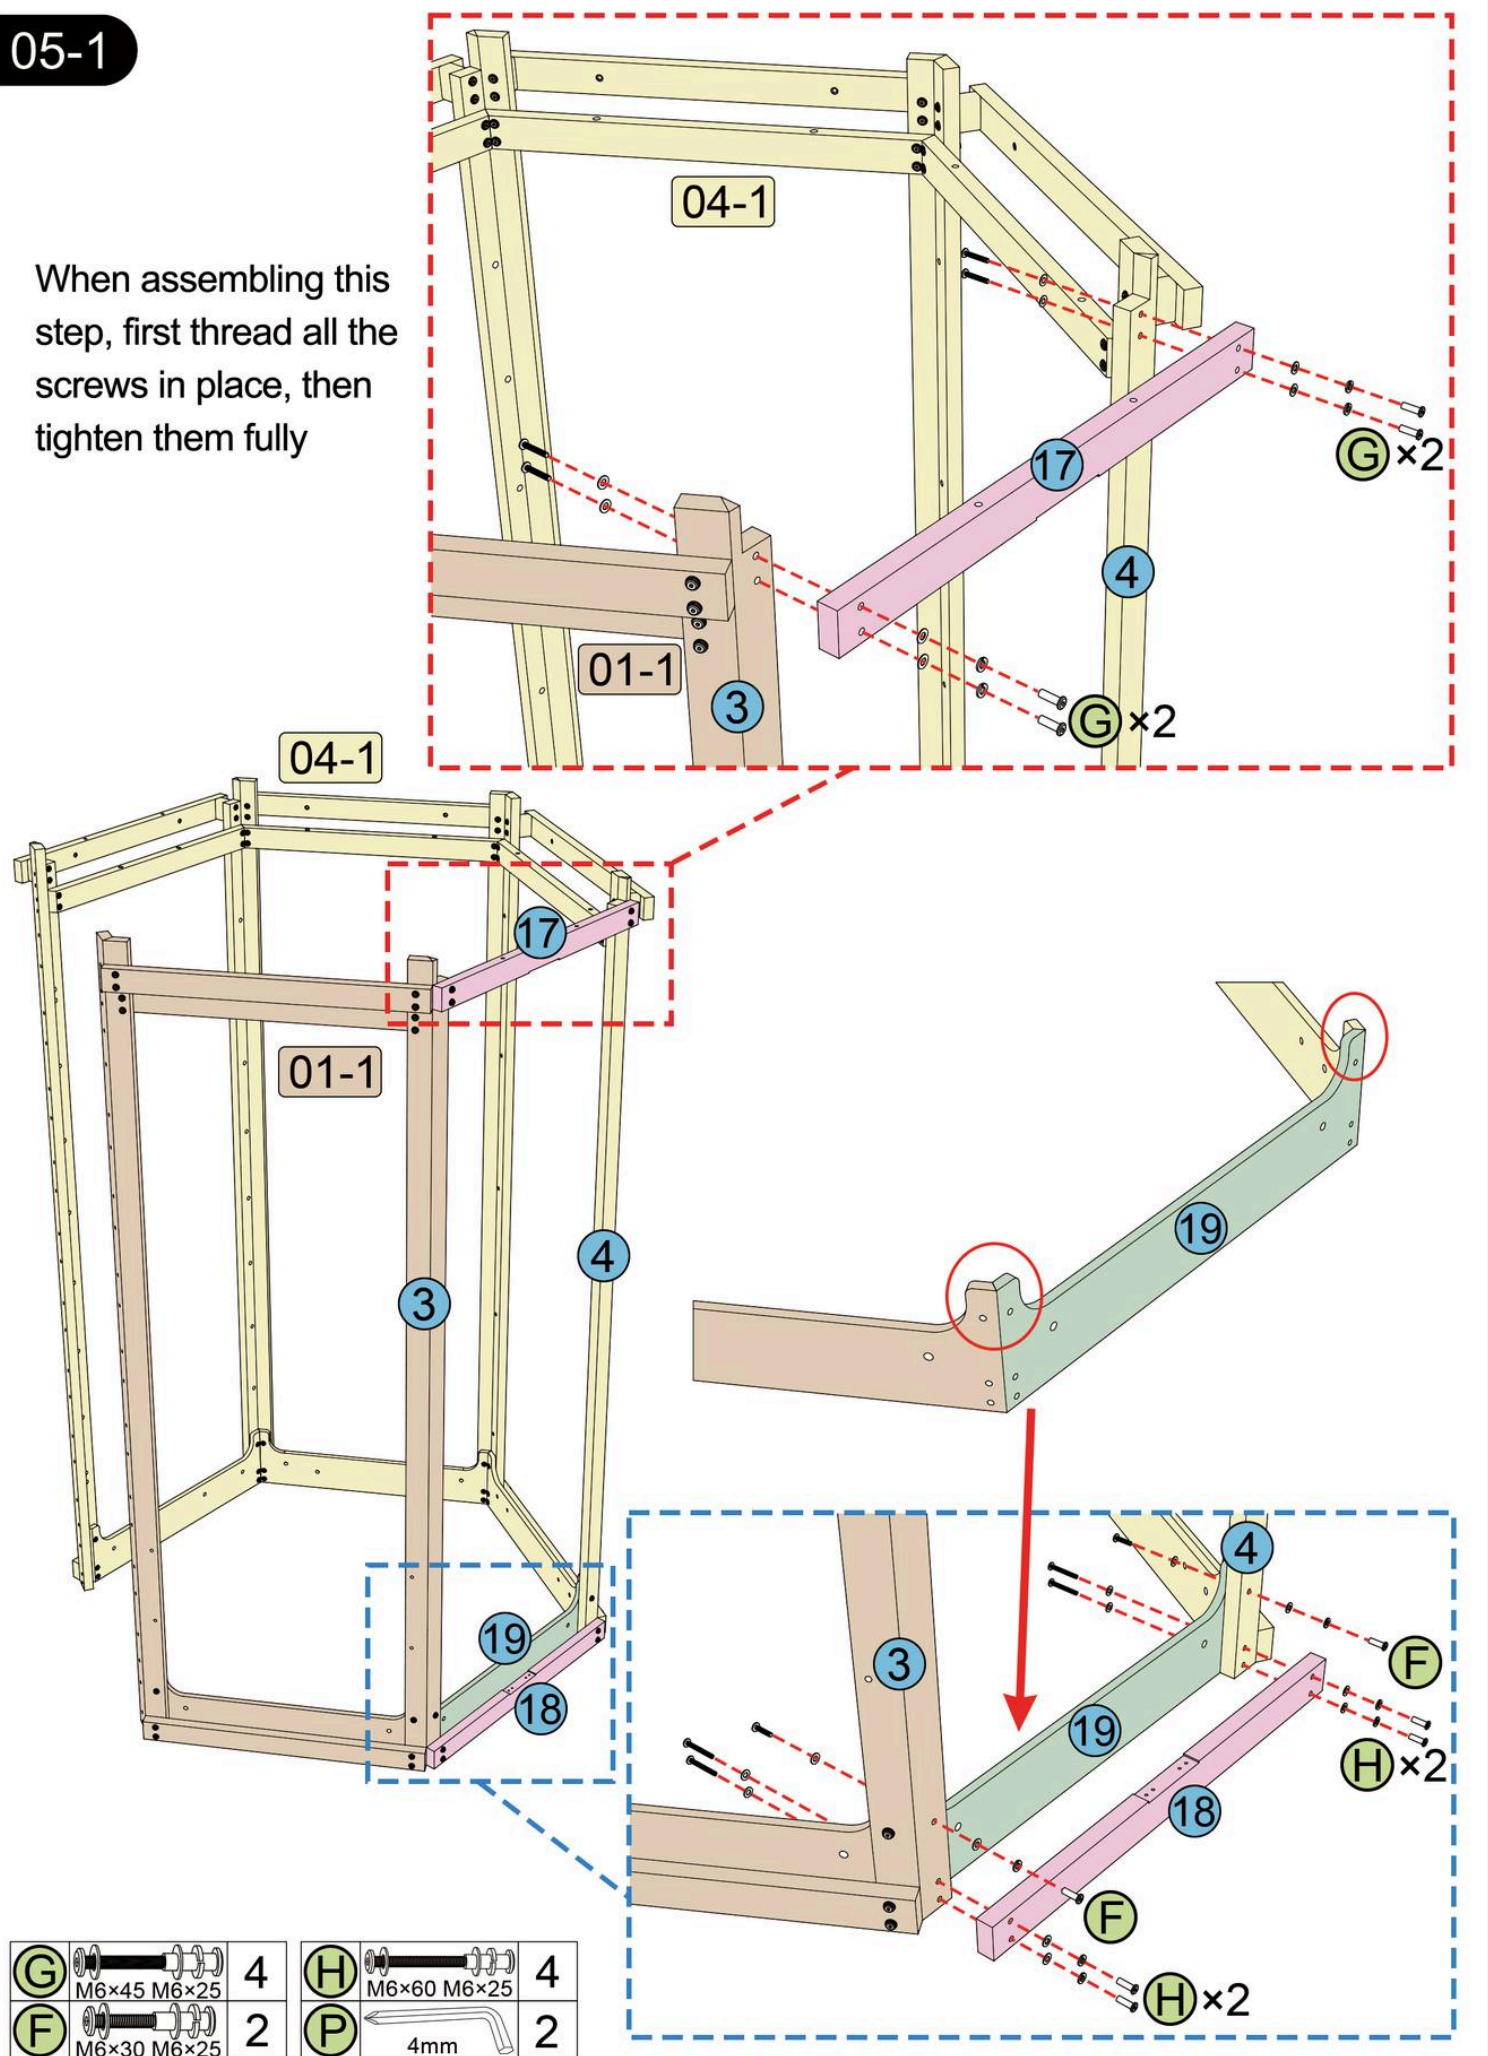

When assembling this step, first thread all the screws in place, then tighten them fully

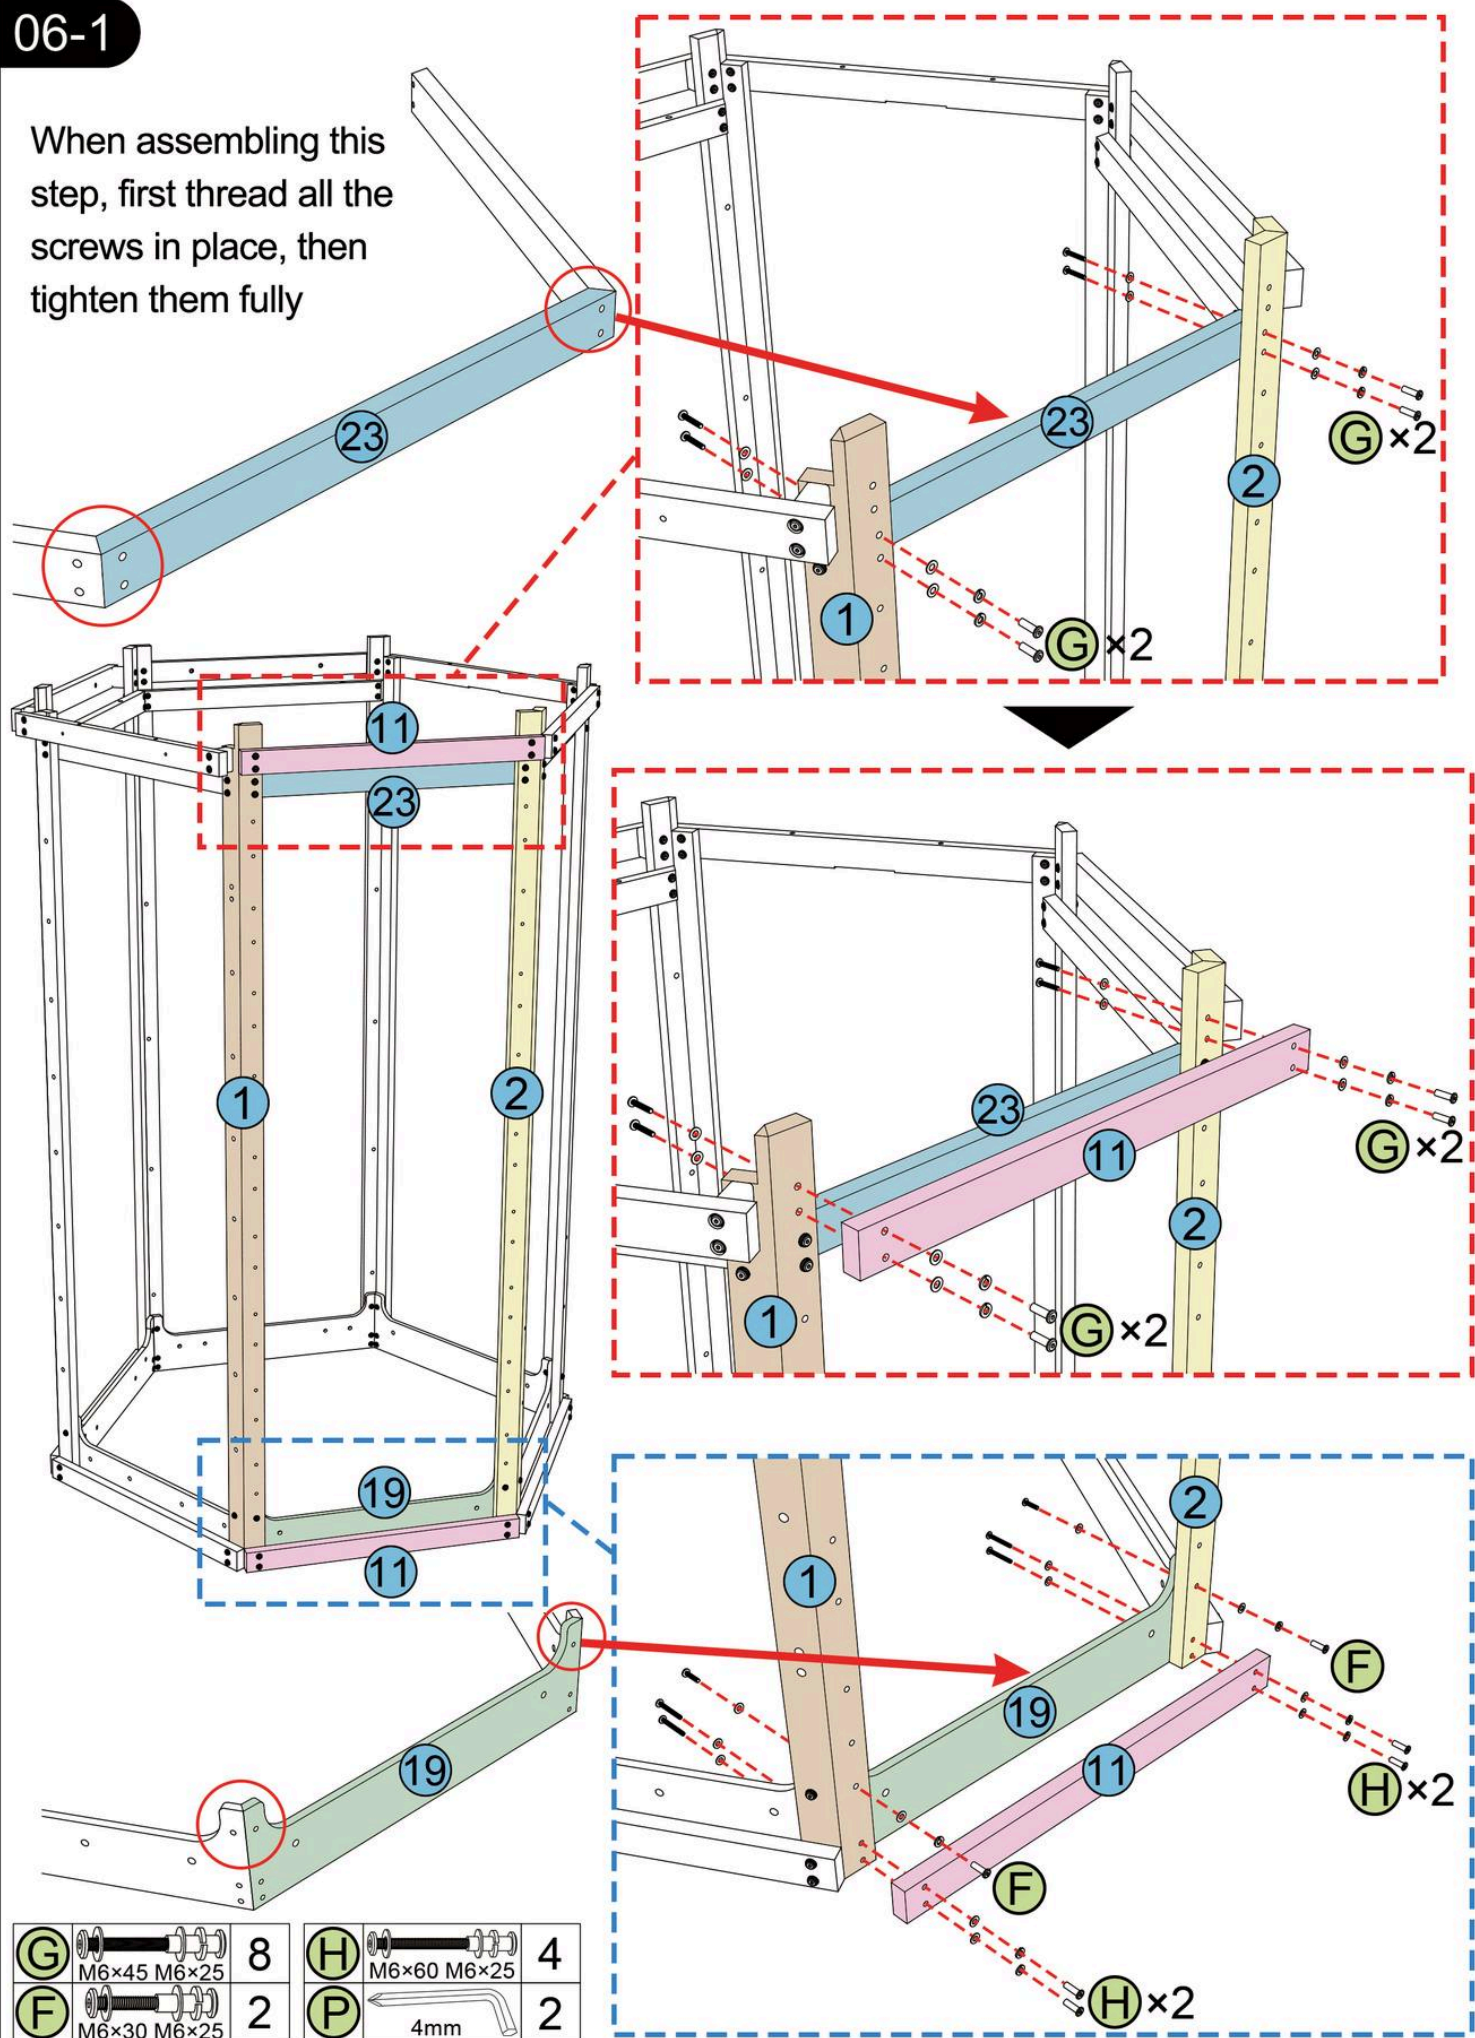

07-1

○ × 2

Note: Make sure the blue seal rim on the nut is facing outward towards you. You may need to twist very hard to secure (and if needed spray WD-40) being that it's meant to be very tight and secure for children to climb on!



× 4

○ × 2



○ × 2







× 5


(M)	M10×35	18	(Q)	8mm	1	(R)	17mm	1	(O)	M10	18
-----	--------	----	-----	-----	---	-----	------	---	-----	-----	----


07-2

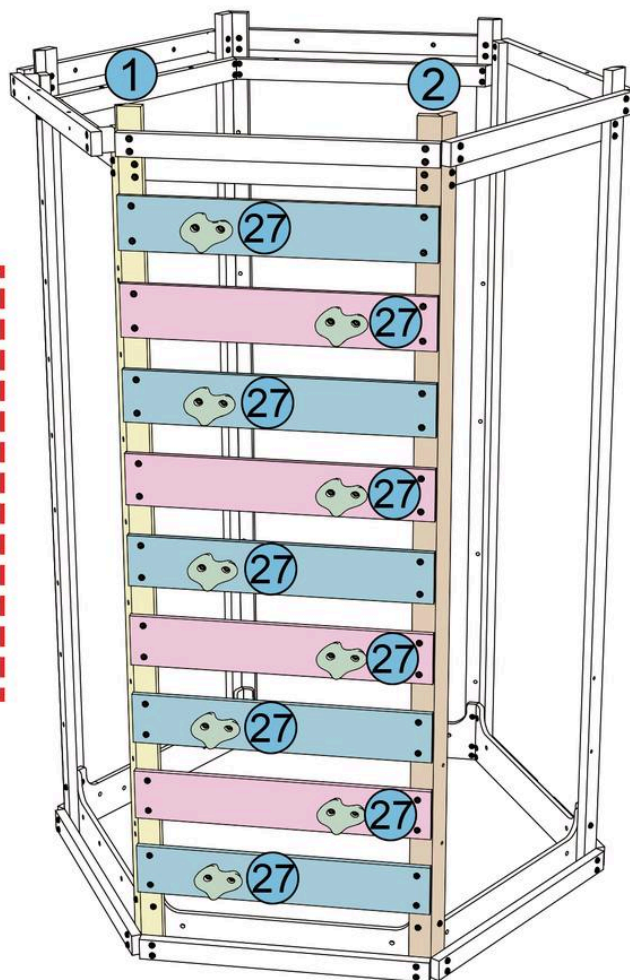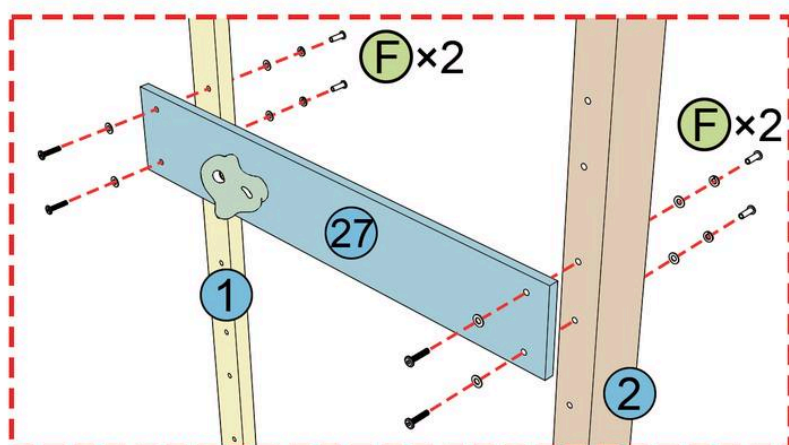

(F)	M6×30 M6×25	36
(P)	4mm	2

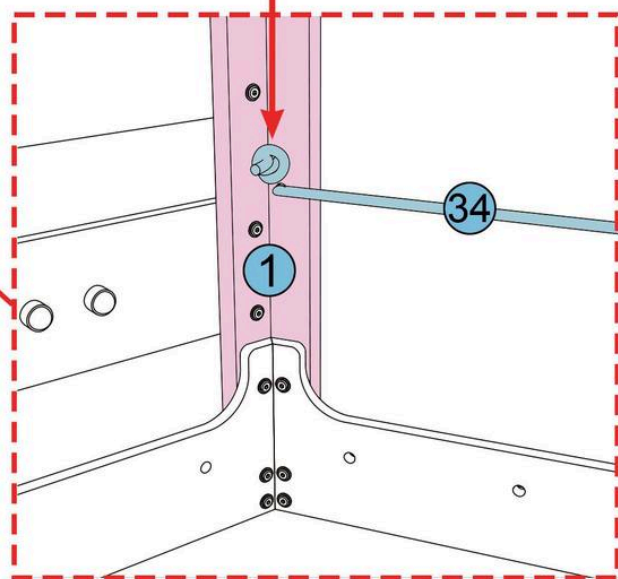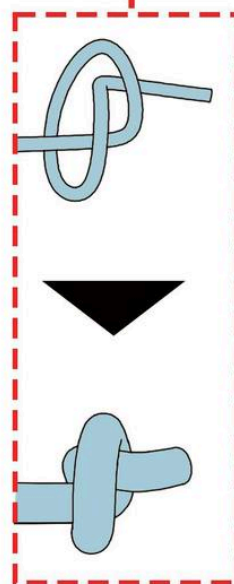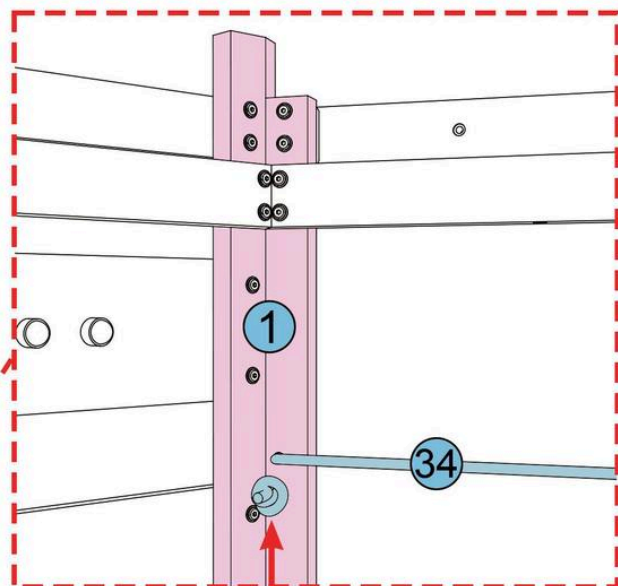
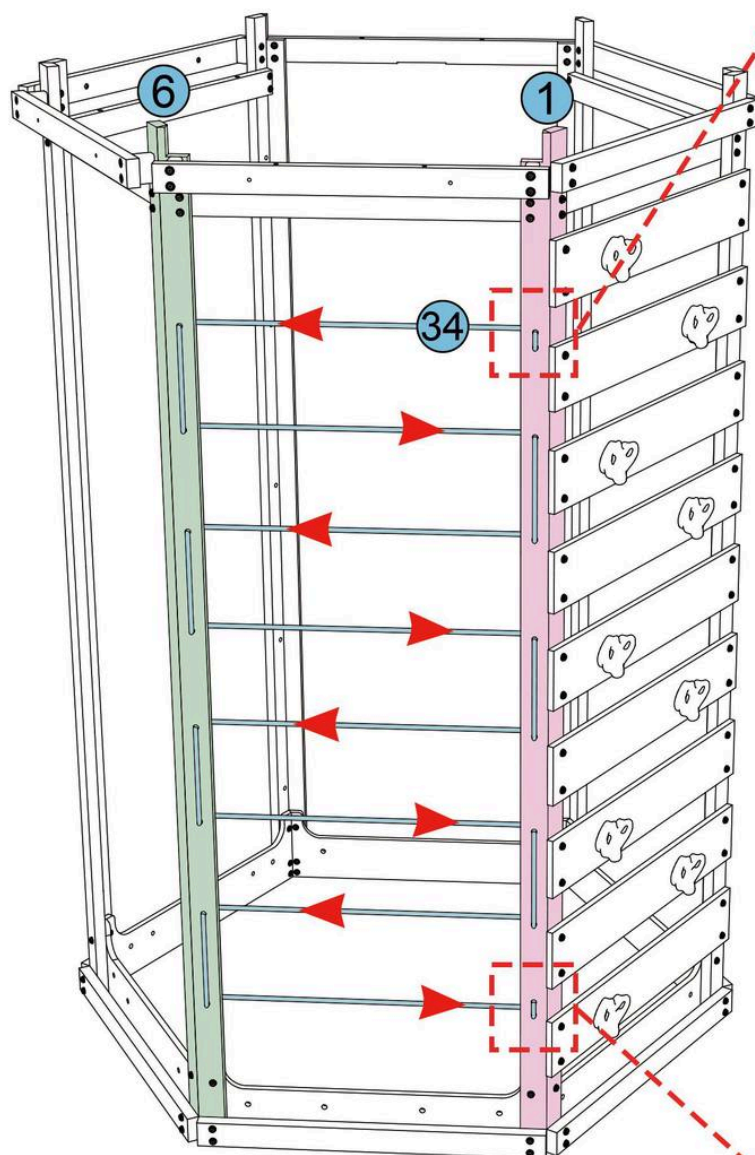


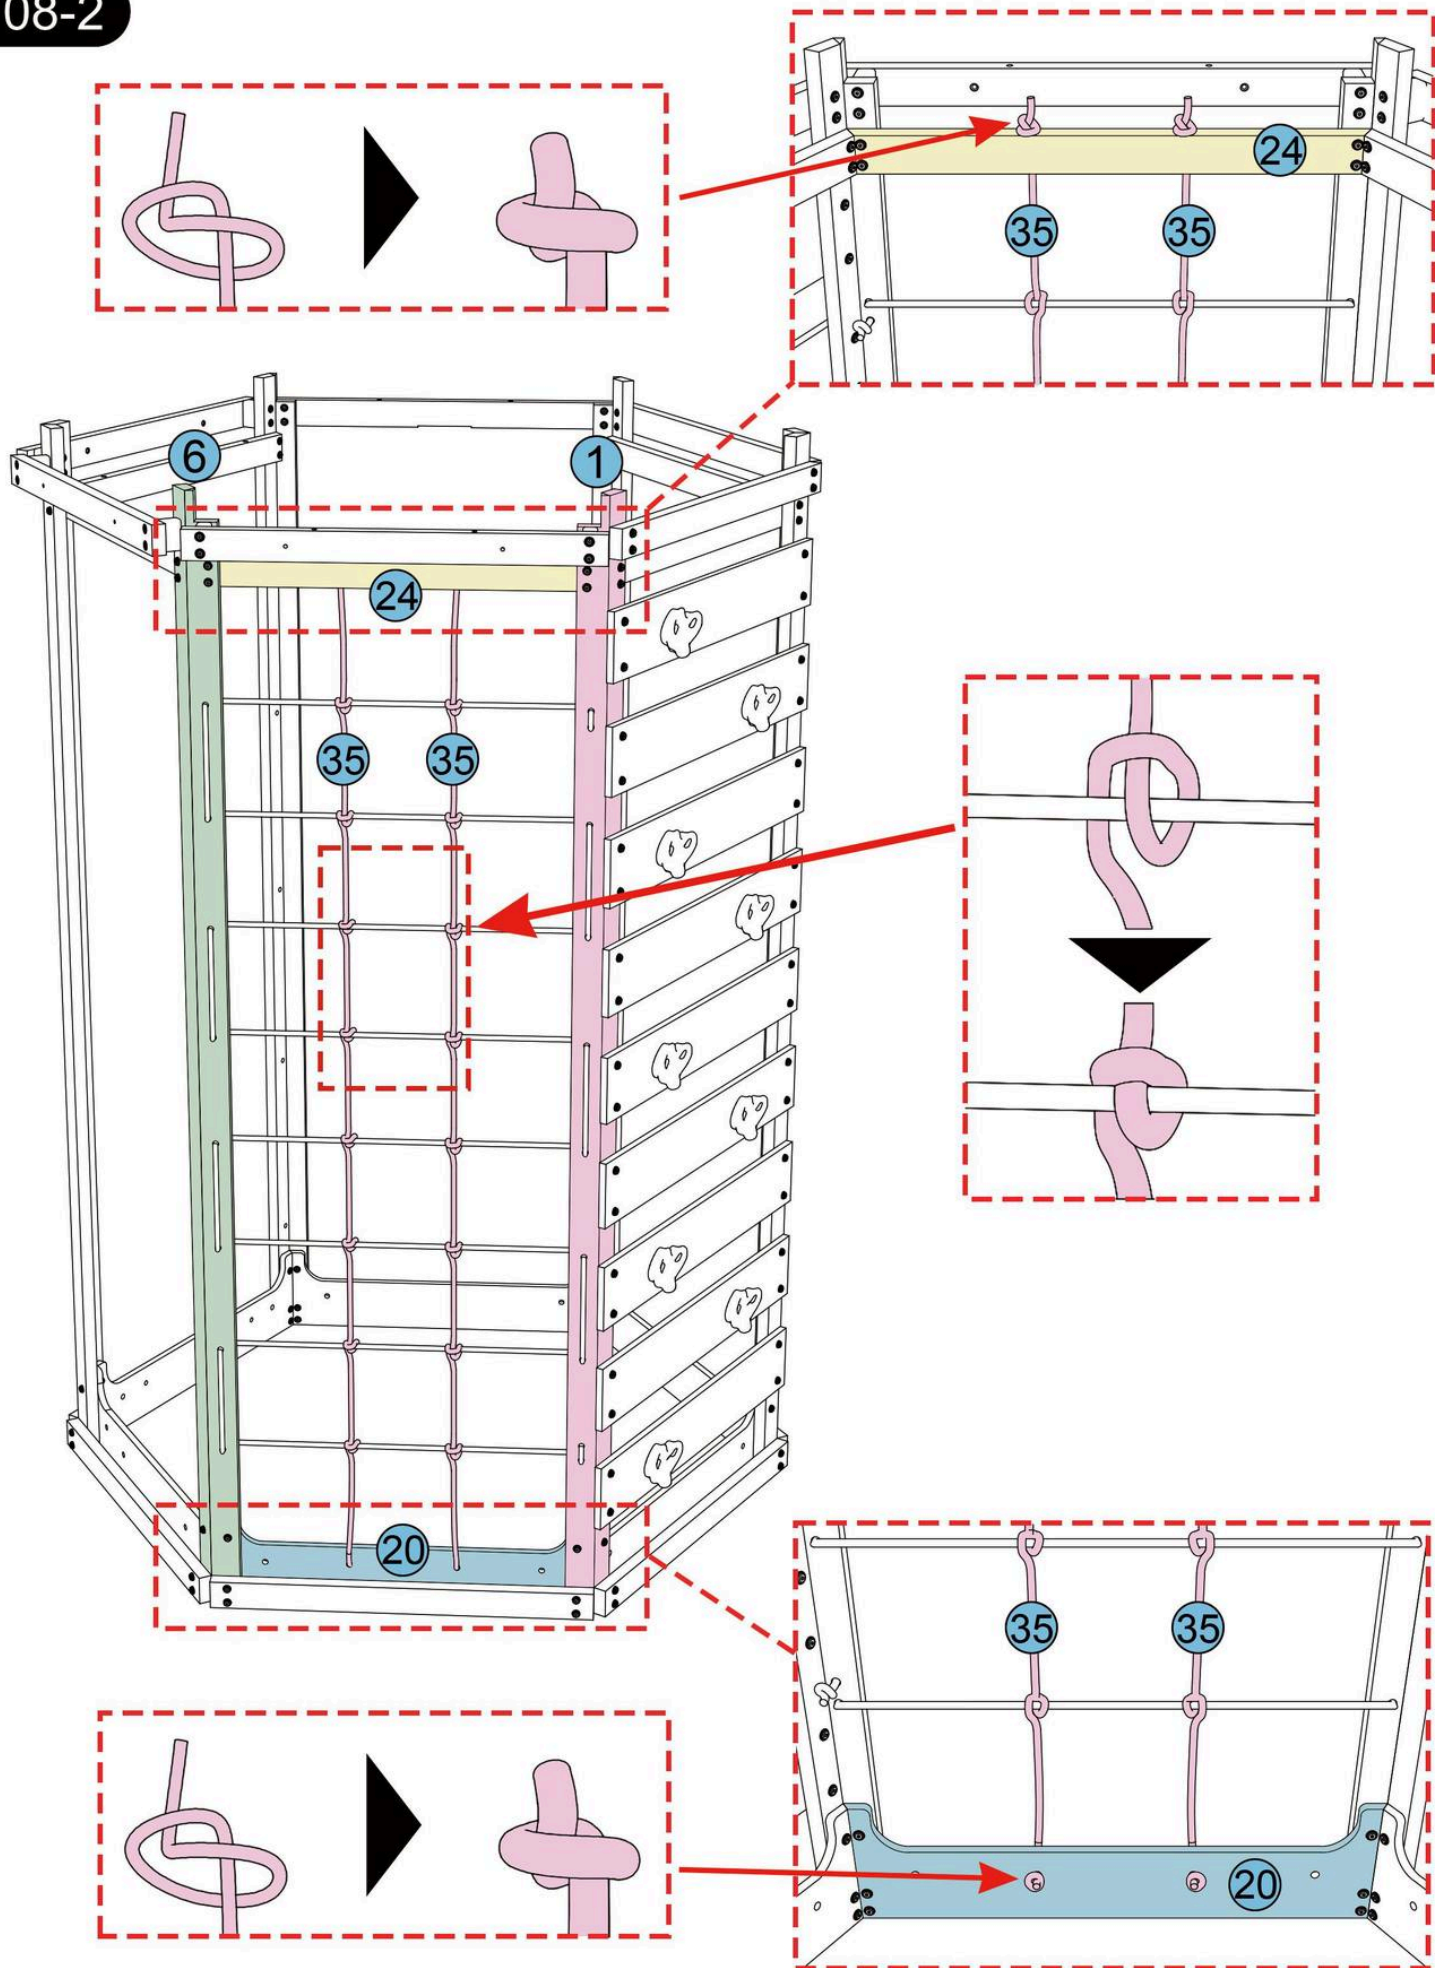

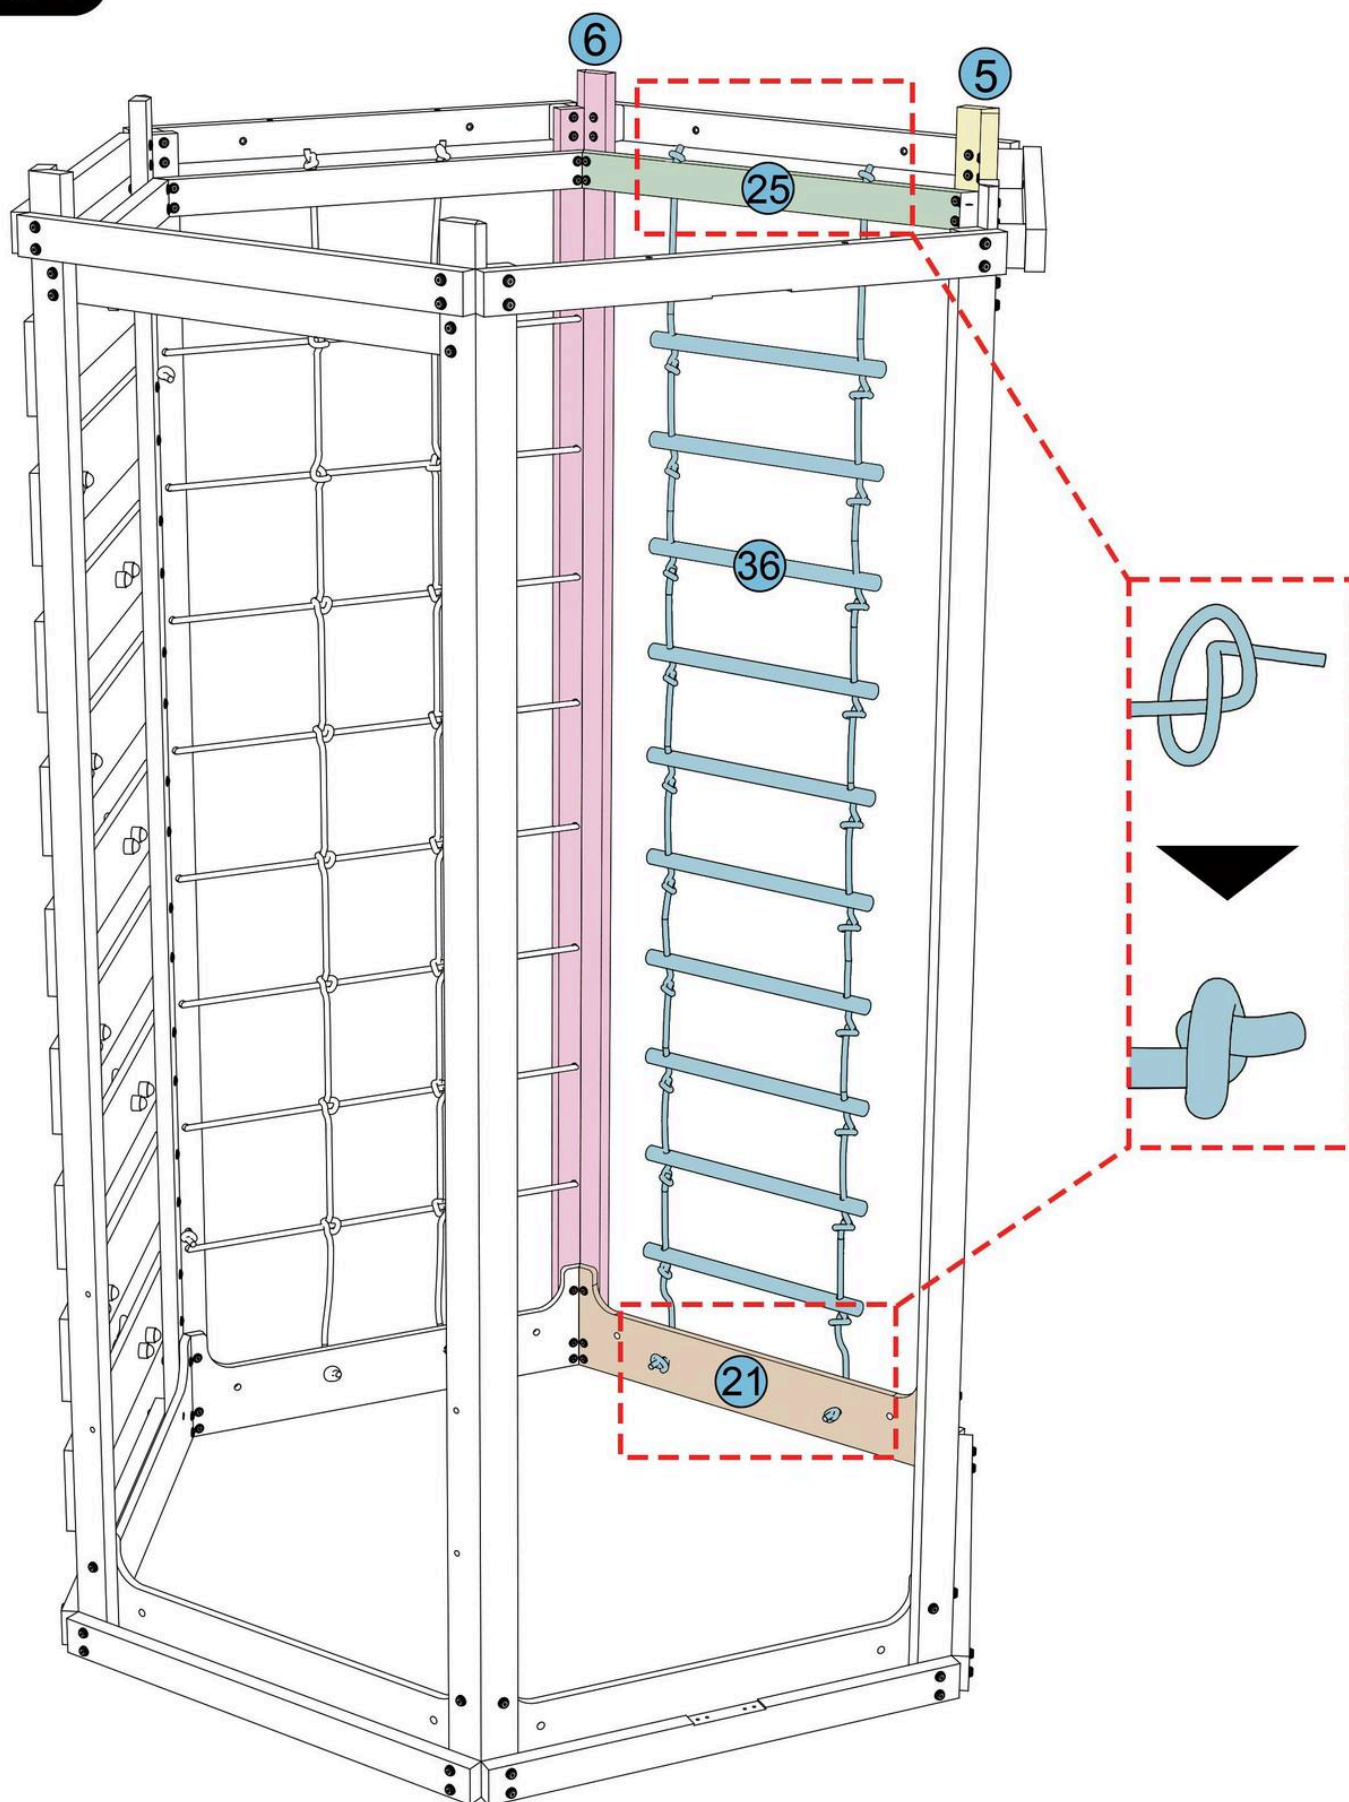



2in

The Part 37 ring is marked with top and bottom orientations, the two screws mounted on its upper side is 2in in length.

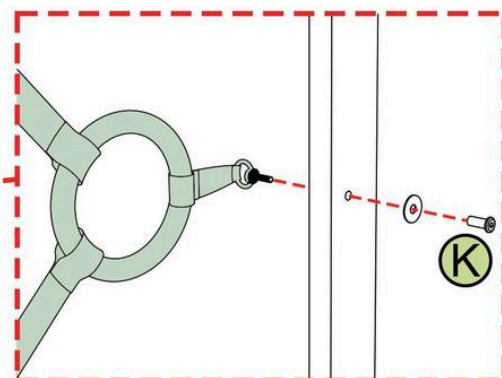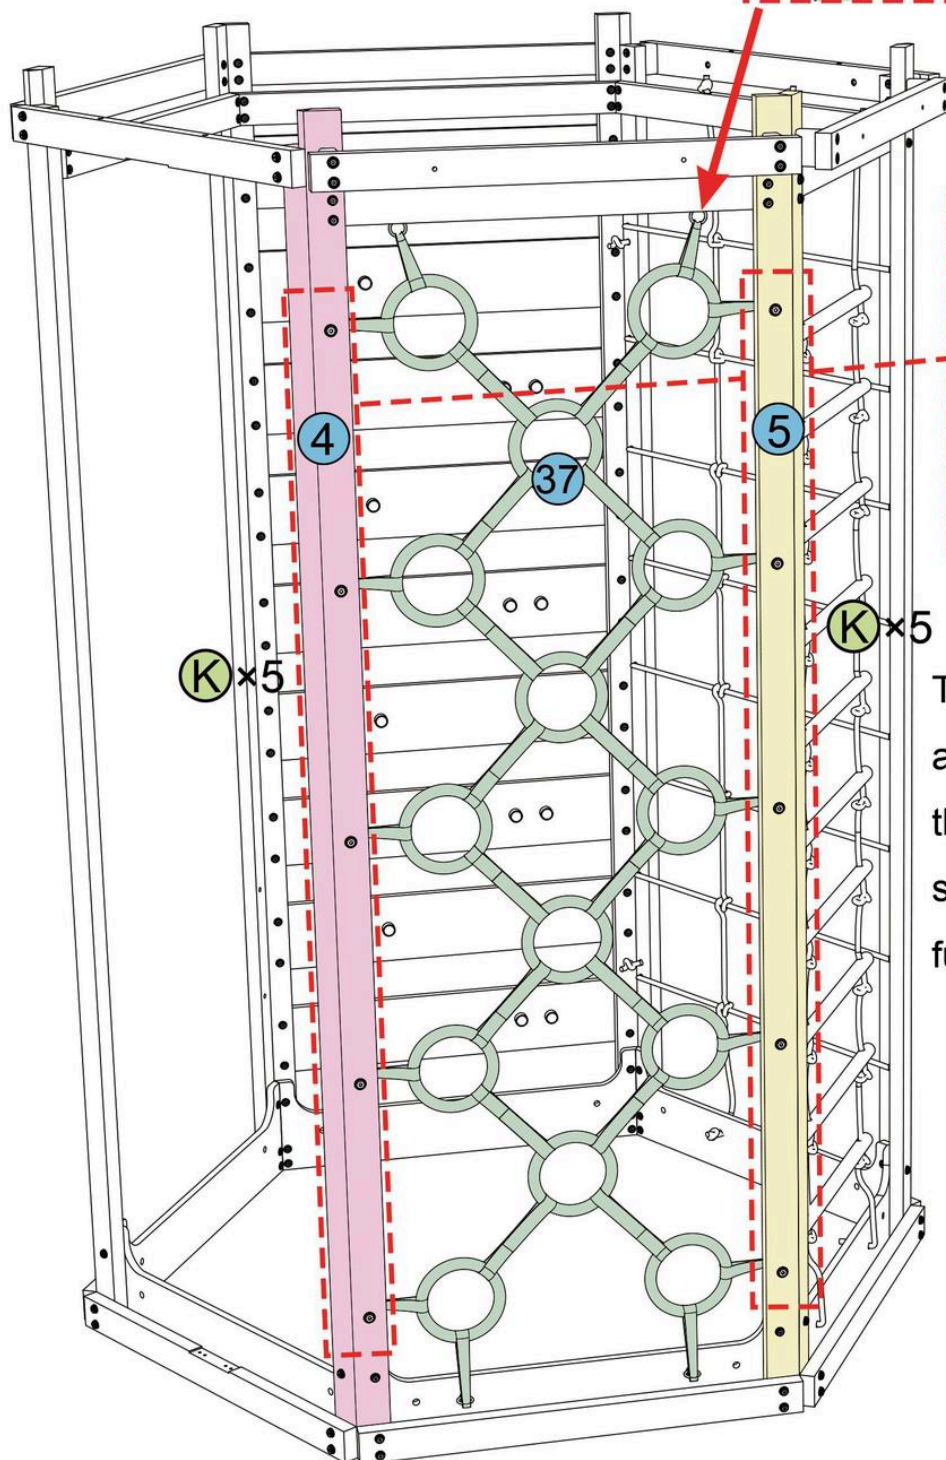


Tighten the Screws (K) partially at this step (do not fully fasten them). On Step 10-2 , install all screws on Part 37 , and then fully tighten all screws together.




(K)	 M6×25	10
(P)	 4mm	2

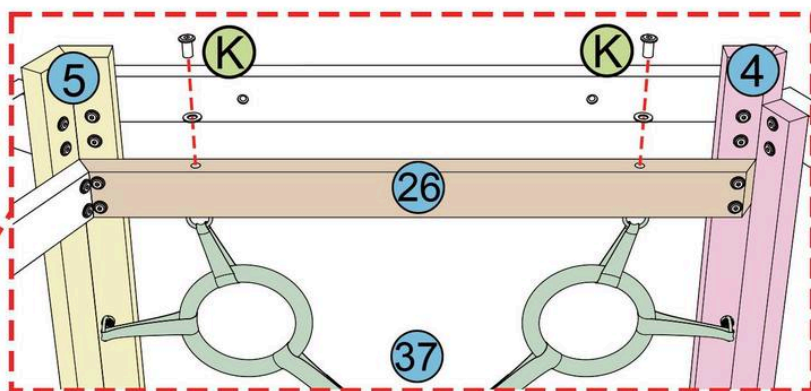
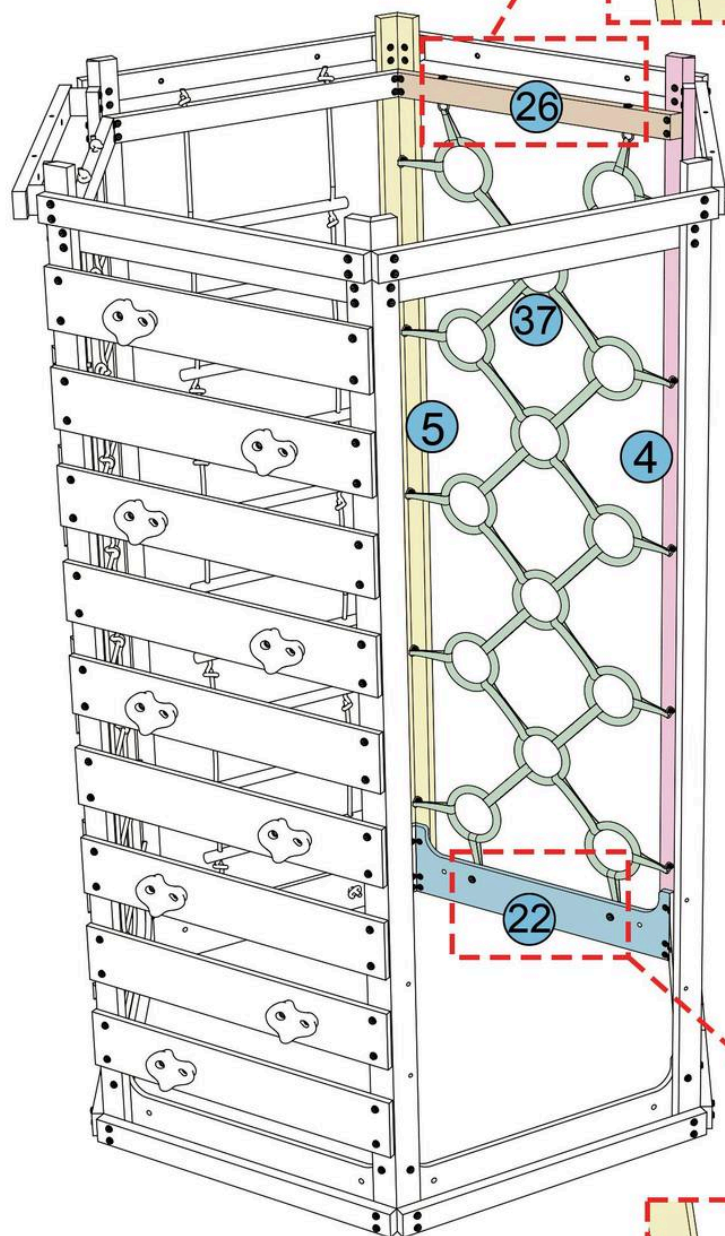


First fasten the lower Screws (L),
then fasten the upper Screws (K).


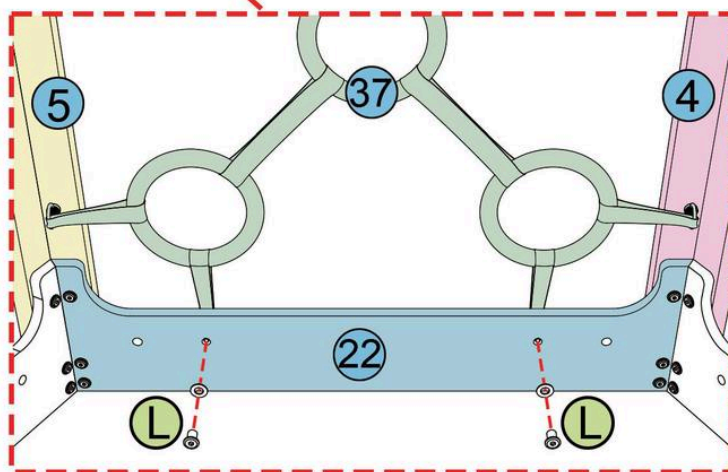



(L)		M6×15	2
(K)		M6×25	2
(P)		4mm	2

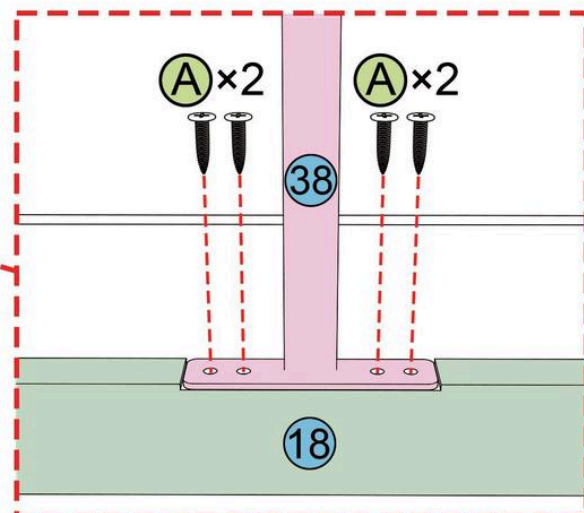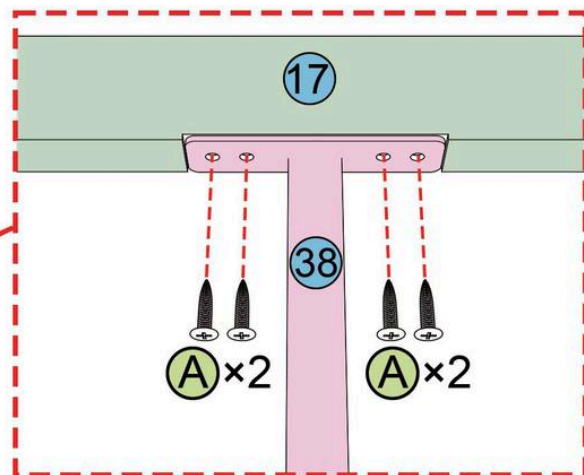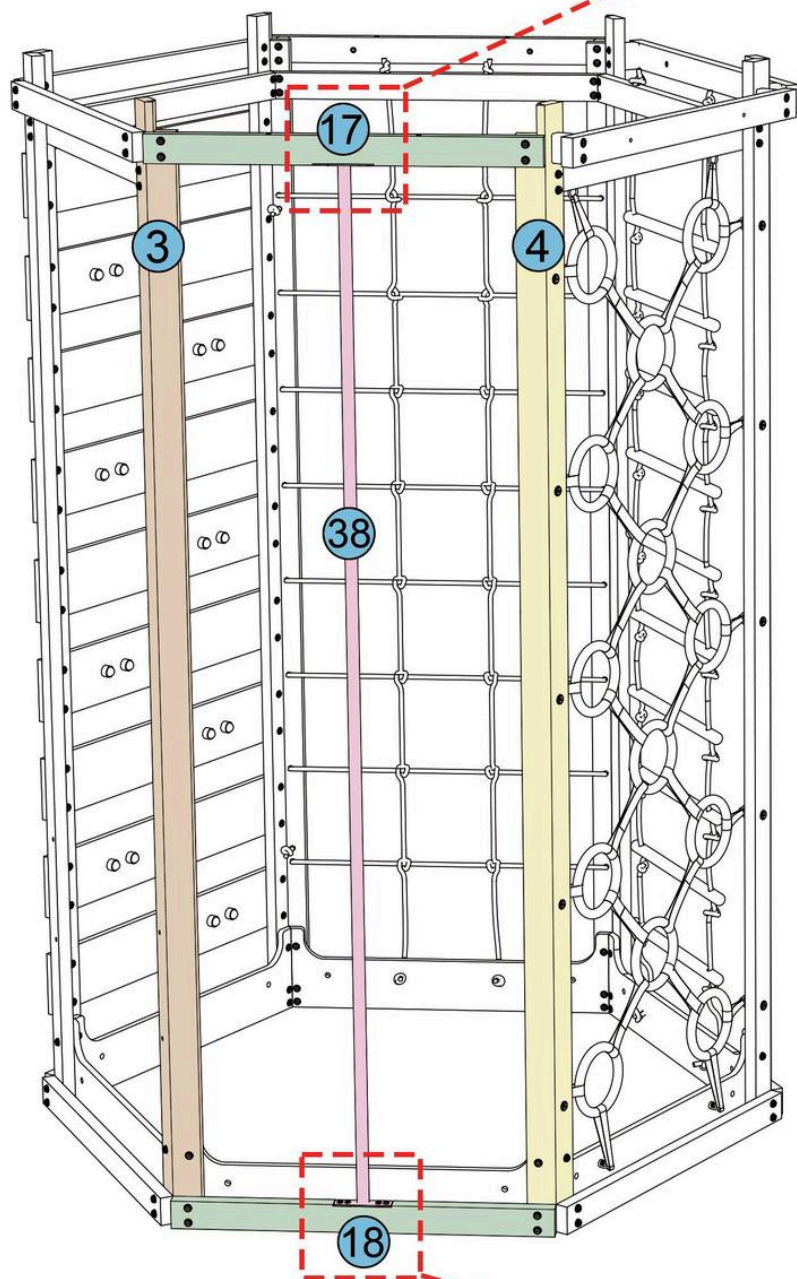

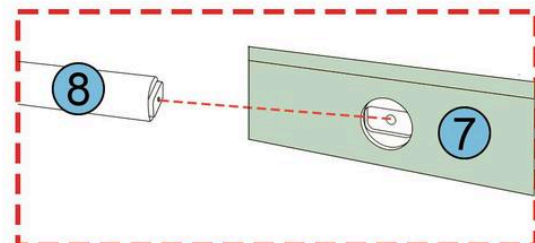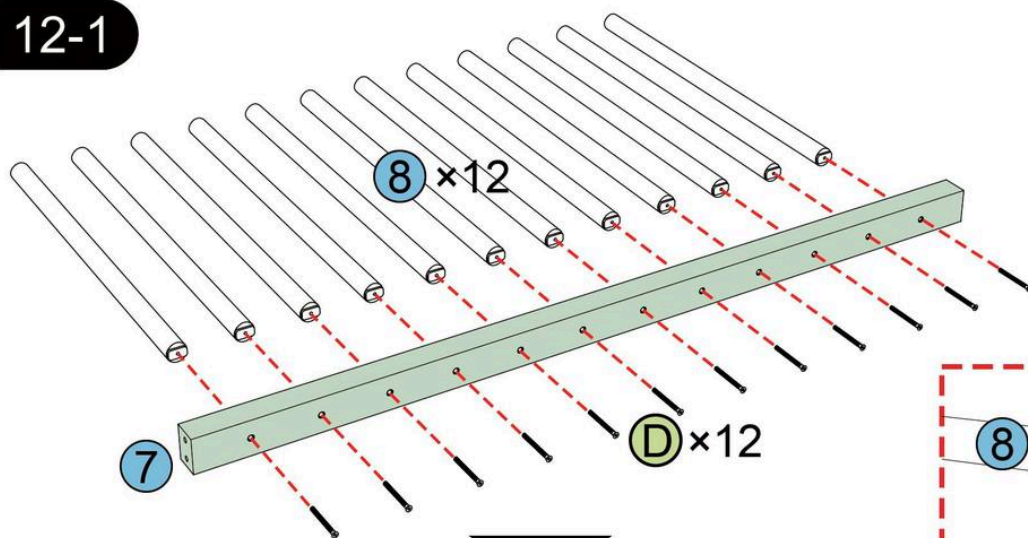



The protruding end of (8) fits with the holes of parts (7). Attach the protruding ends first to (7) with screw (D) before attaching the other side.

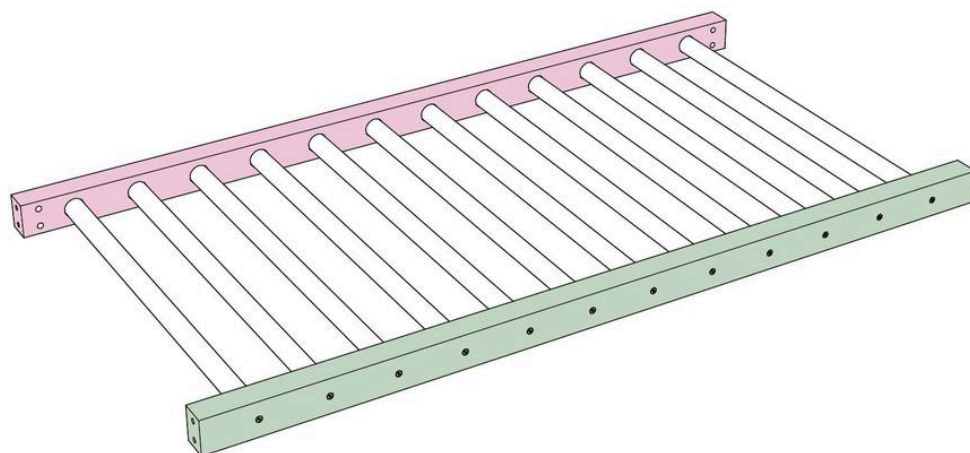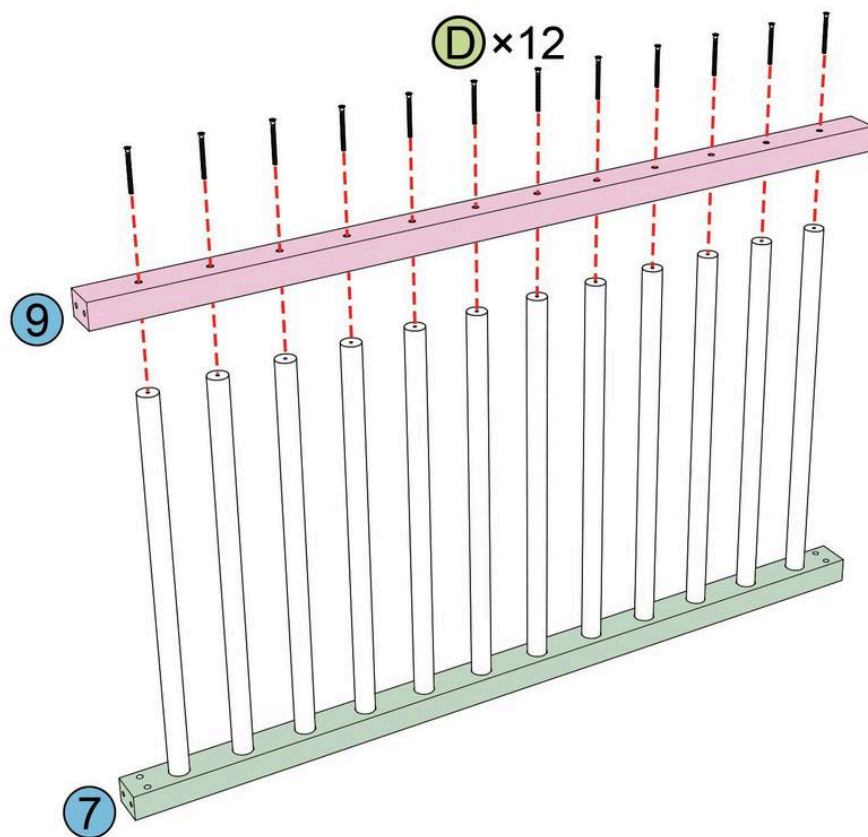


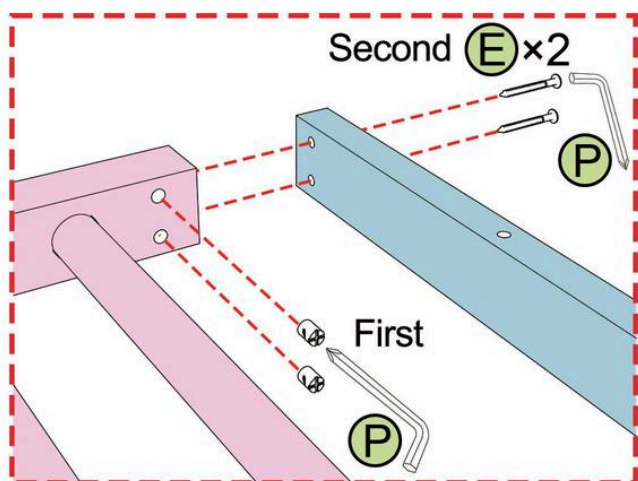



First: Put the connector in the hole with the crosshairs facing out. Use the Philips screwdriver side of one tool part (P) to hold the connector stationary for the threading of the screw go in.
 Second: Use the hex side of the other tool part (P) to thread the screw into the hole of the connector.

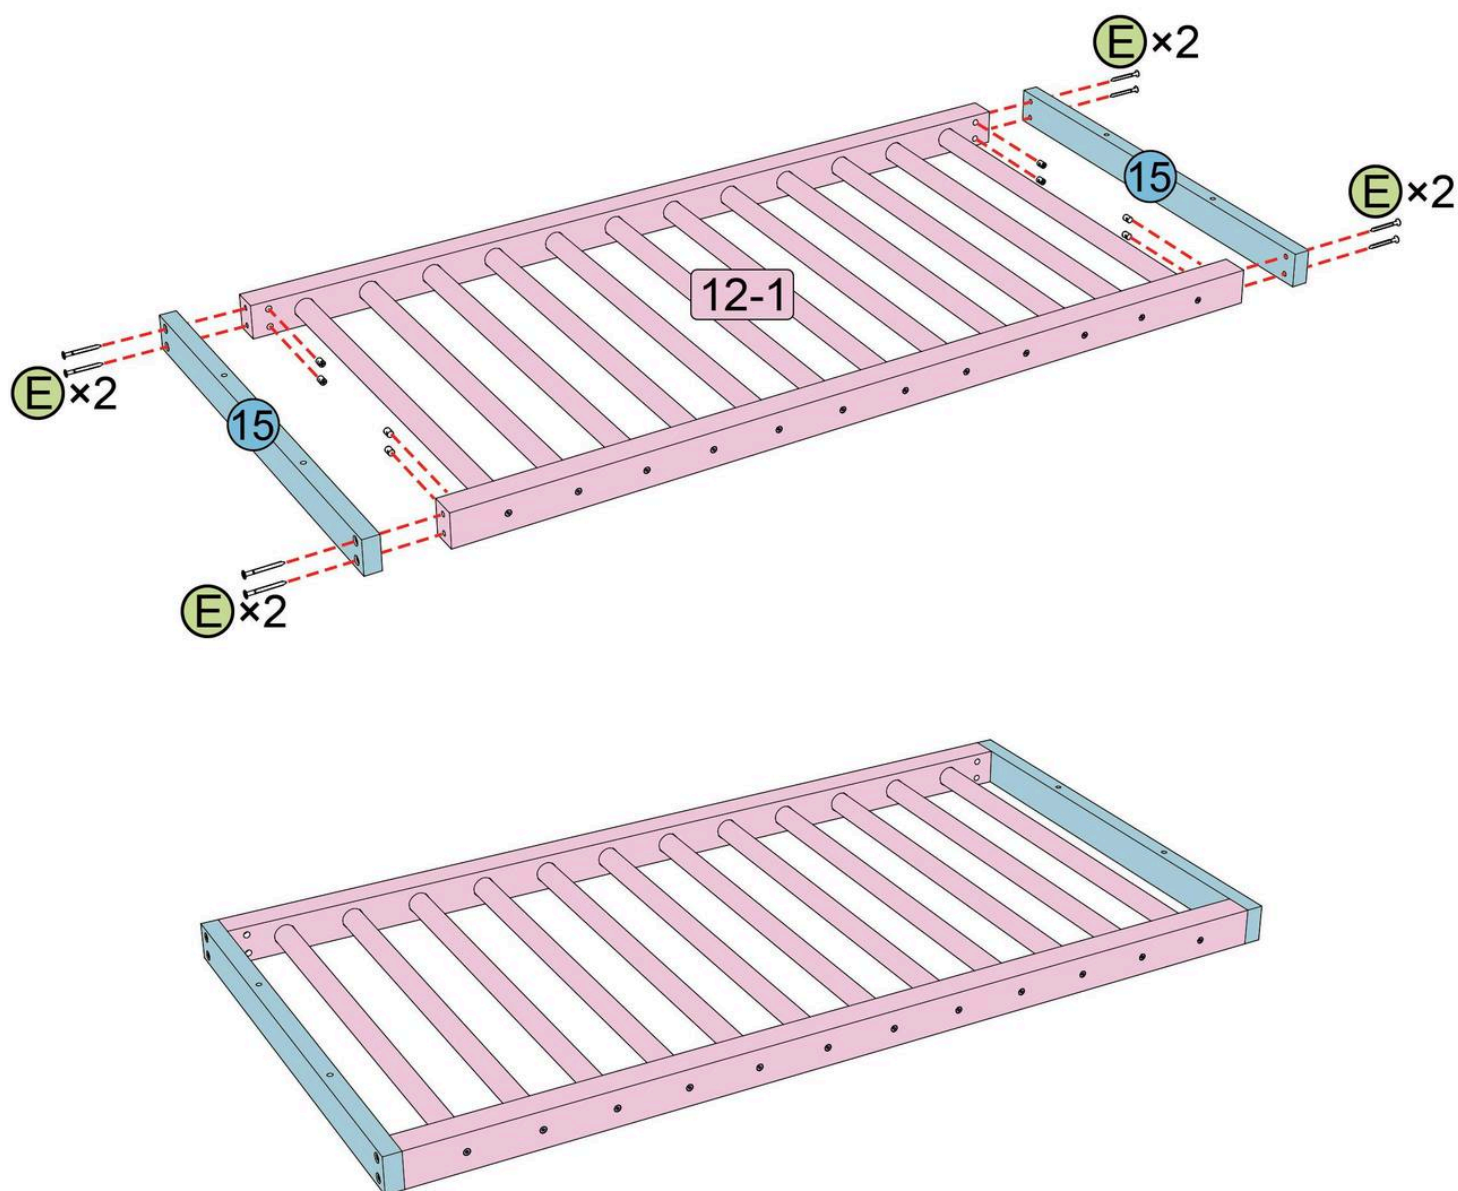



(E)		8
	M6×60 M6×13	
(P)		2
	4mm	





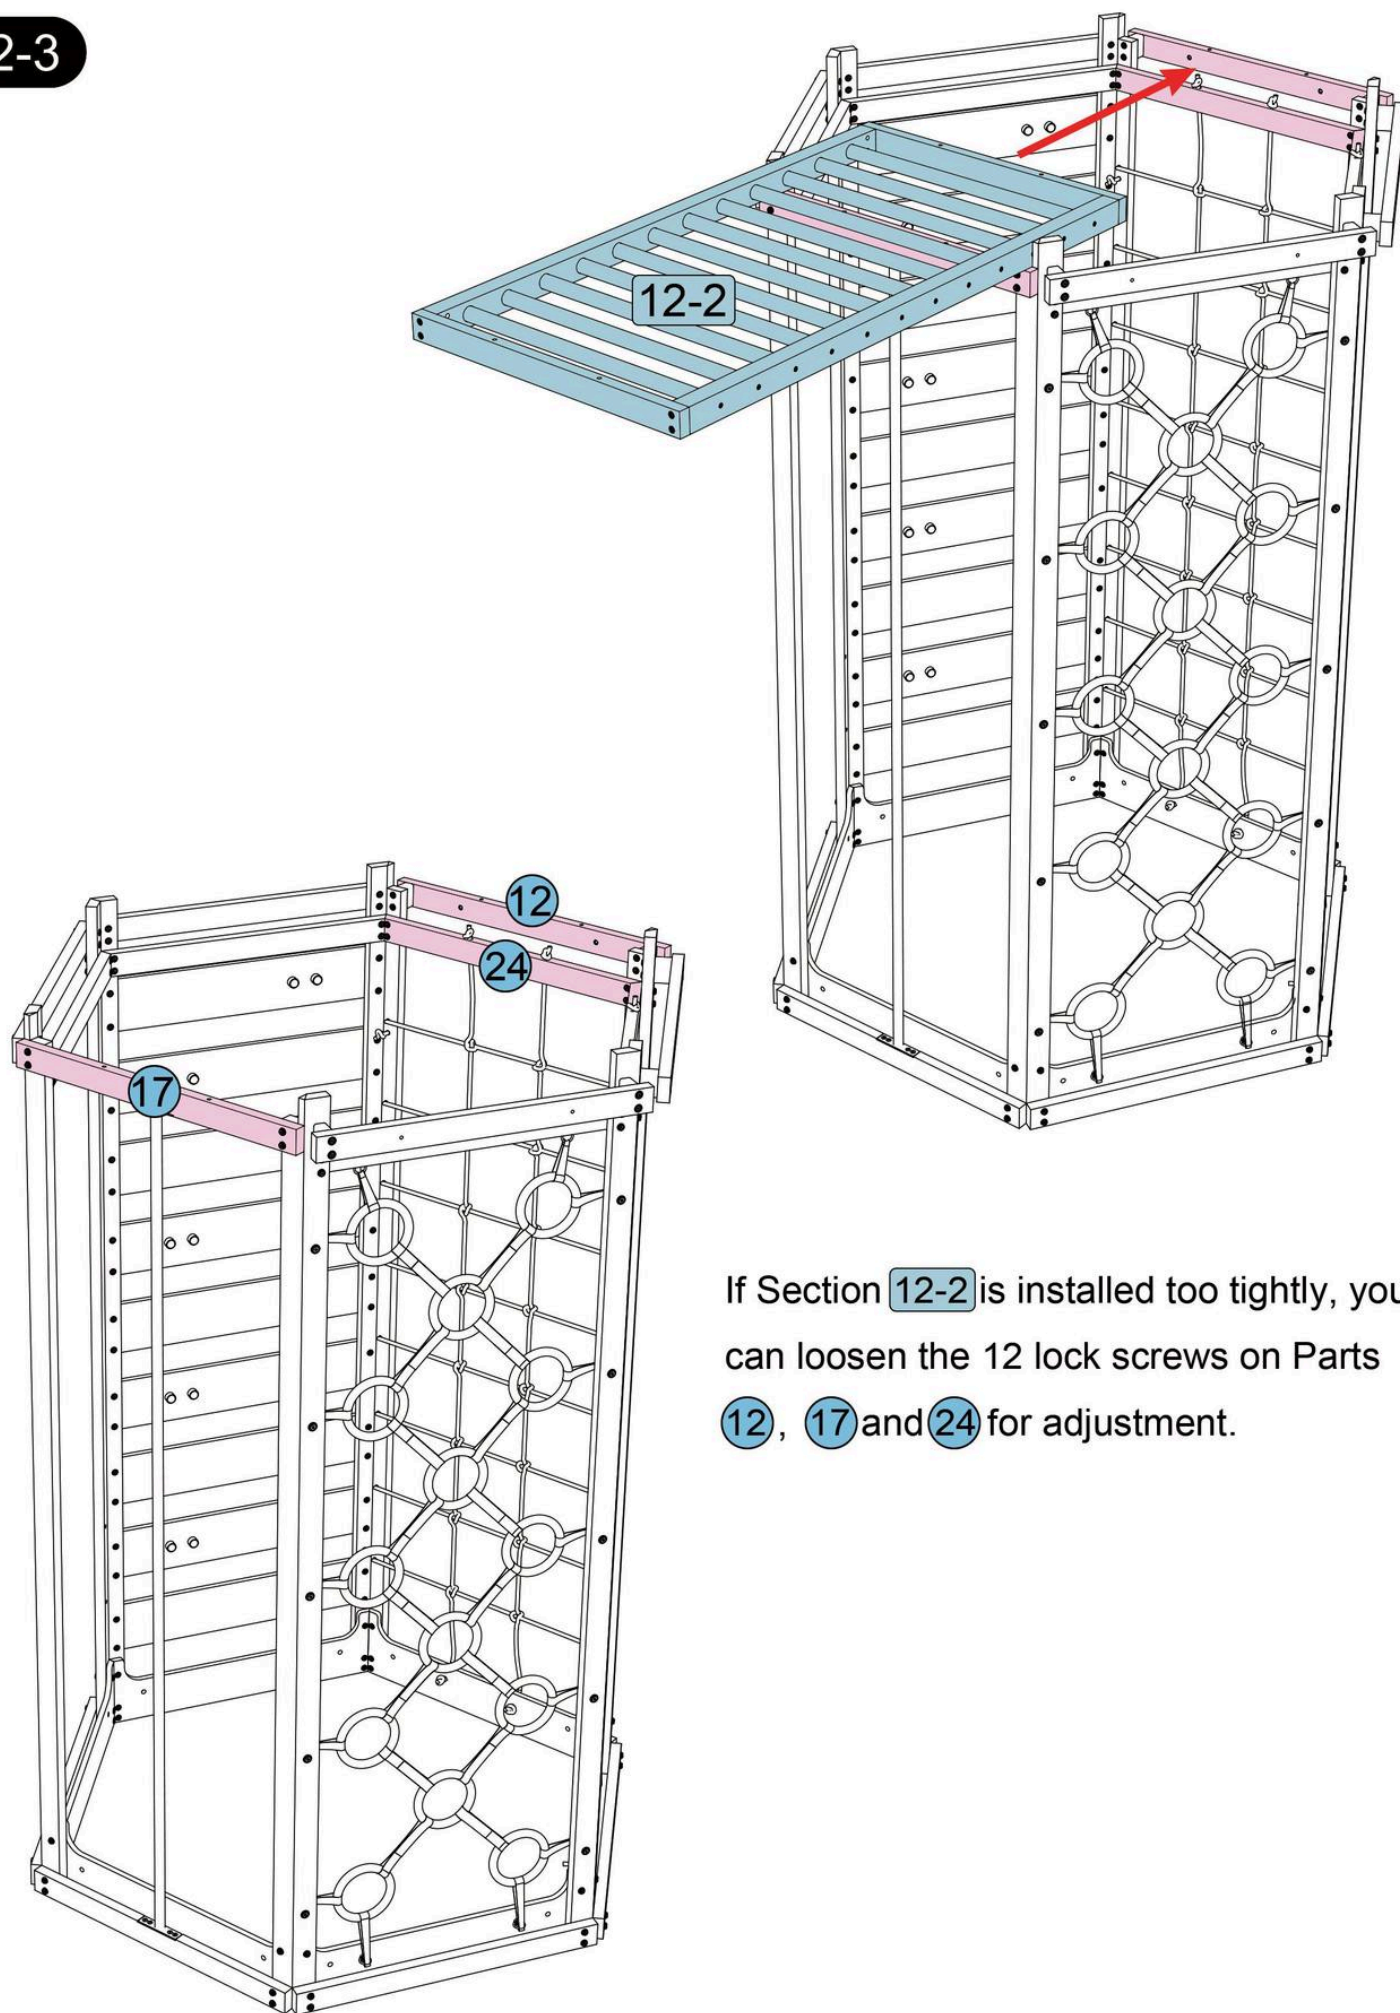


If Section 12-2 is installed too tightly, you can loosen the 12 lock screws on Parts 12, 17 and 24 for adjustment.

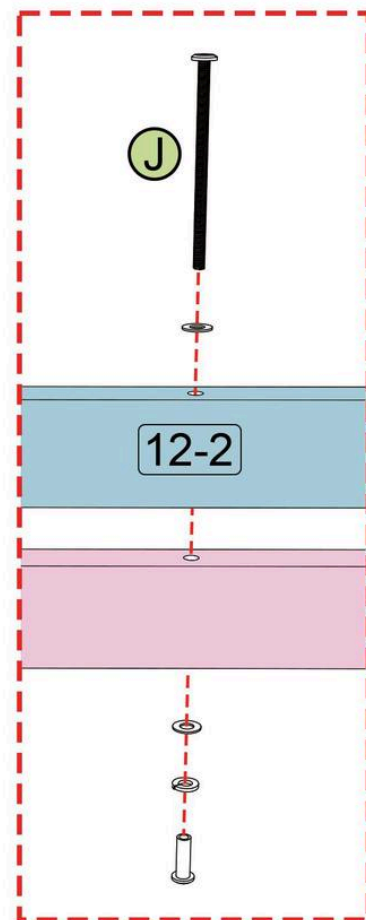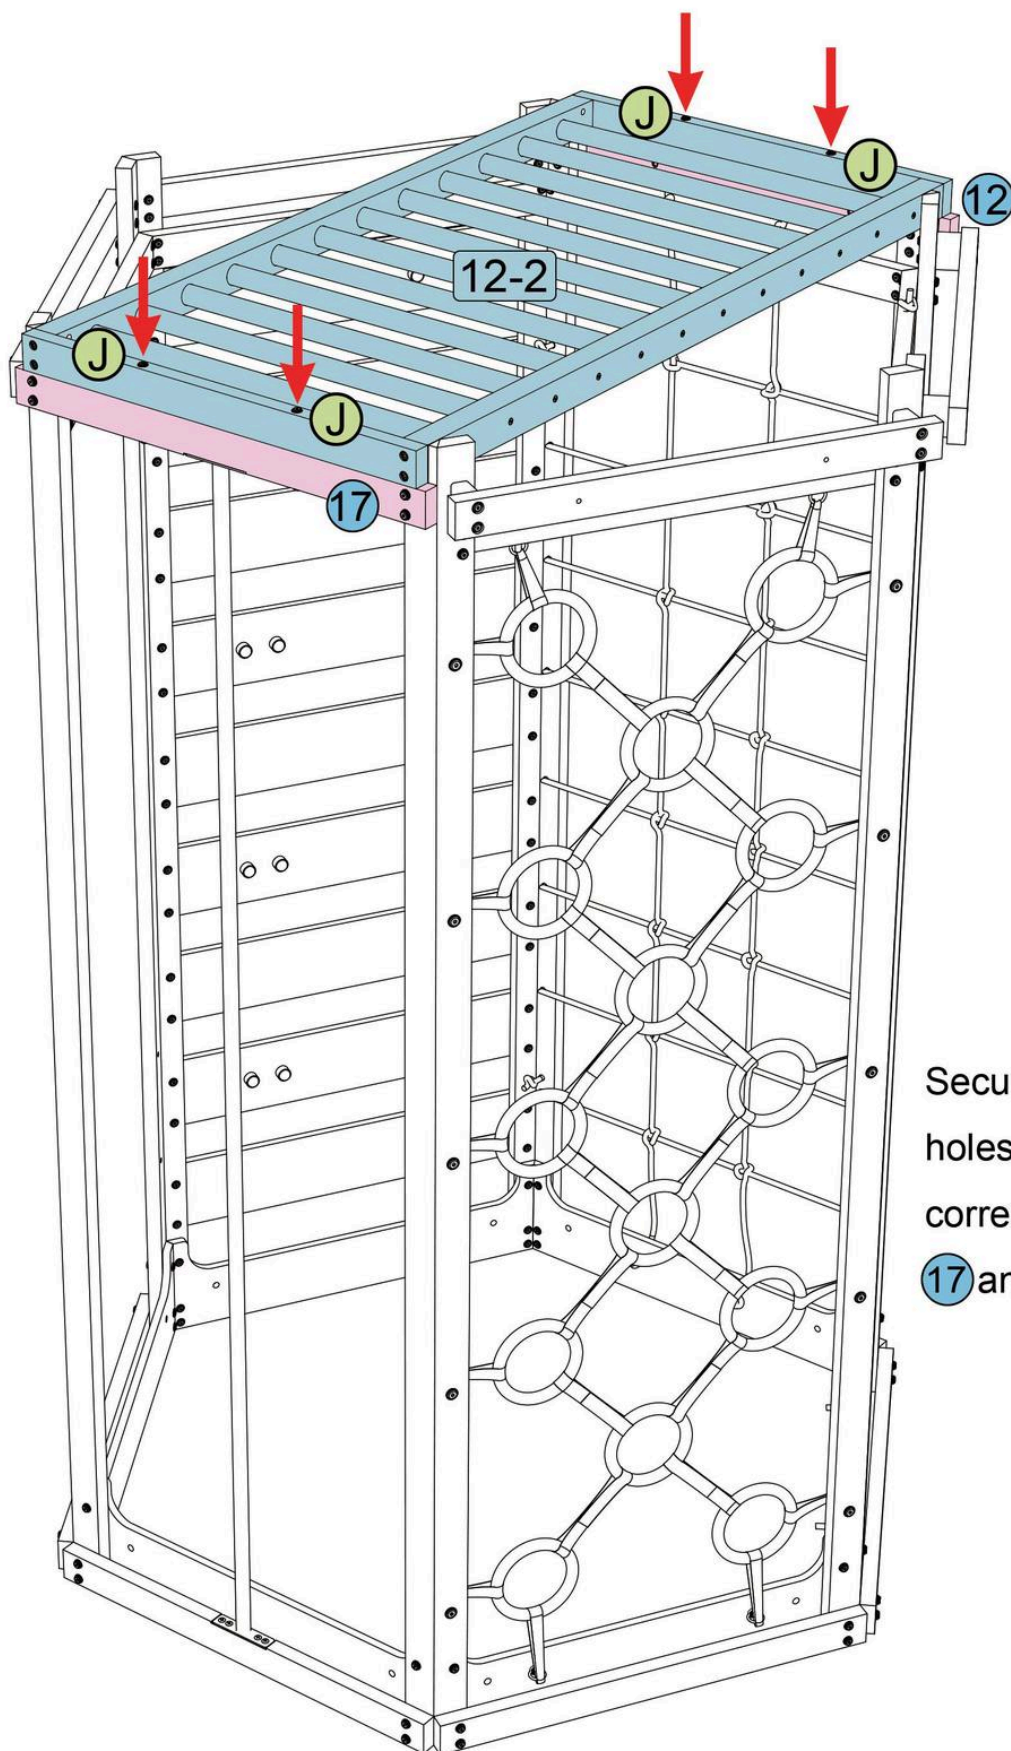


Secure the arrow-indicated holes on Section **12-2** to the corresponding holes on Parts **17** and **12** with screws **J**.

J	 M6×110 M6×25	4
P	 4mm	2

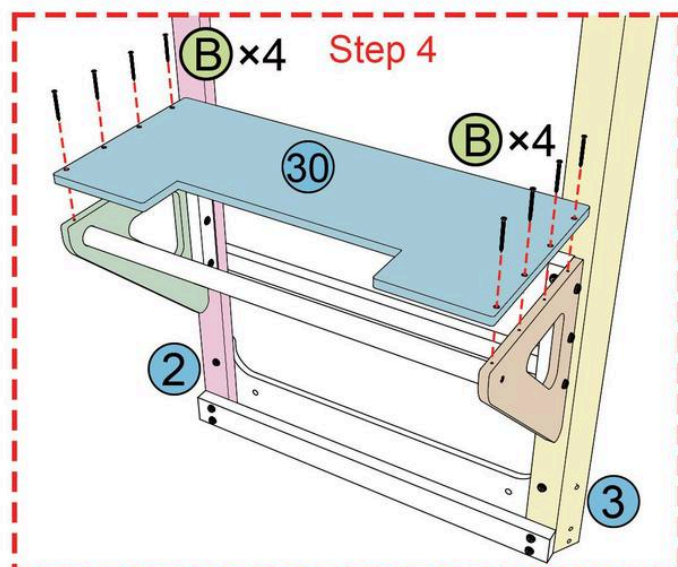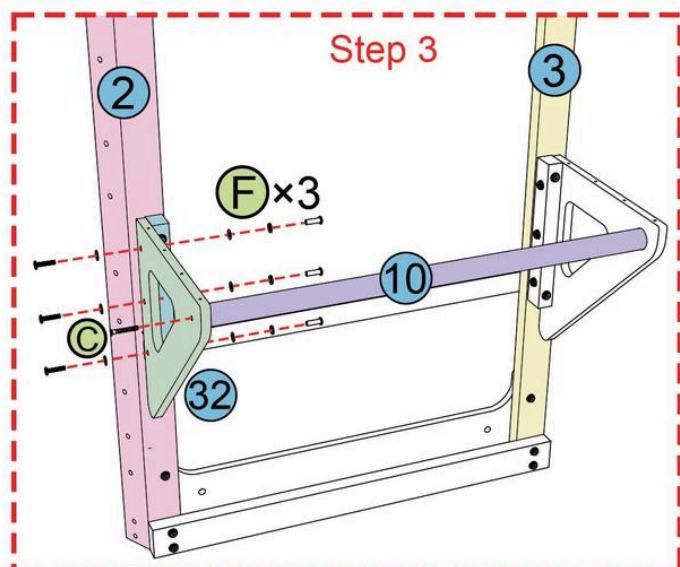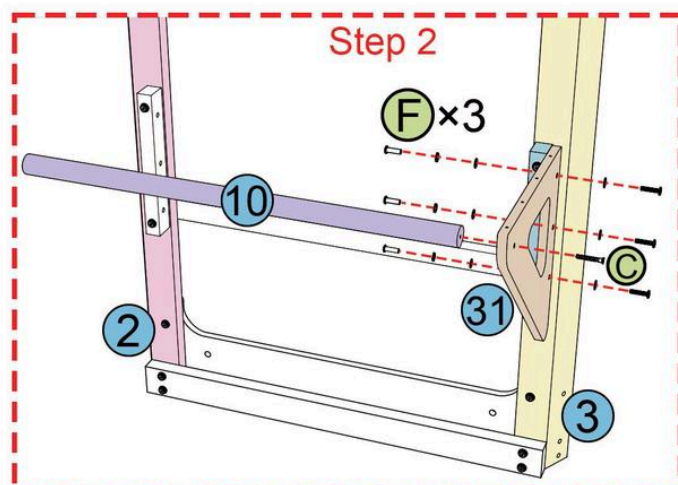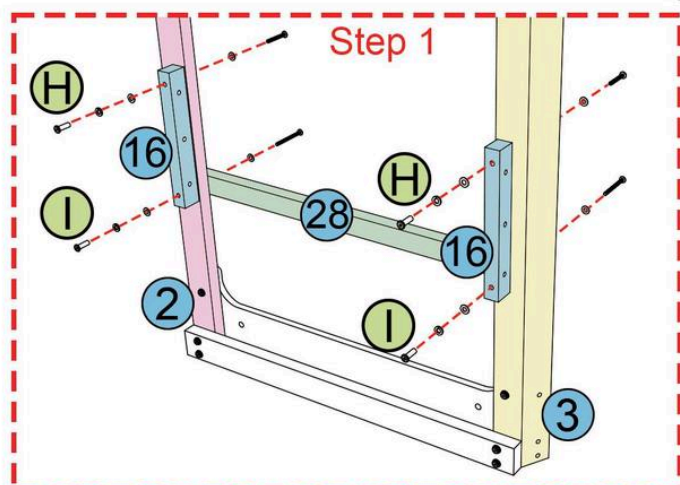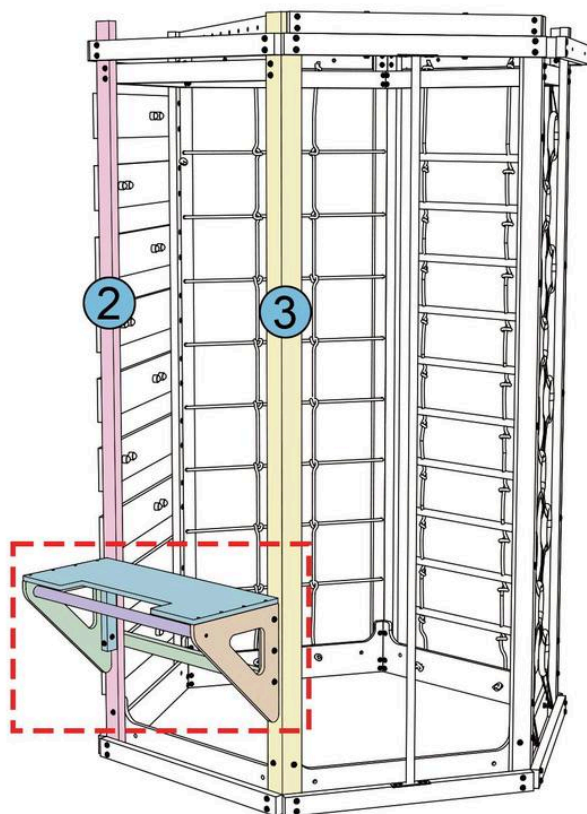


H	M6×60 M6×25	2	F	M6×30 M6×25	6	B	M4×50	8
I	M6×85 M6×25	2	C	M7×40	2	P	4mm	2

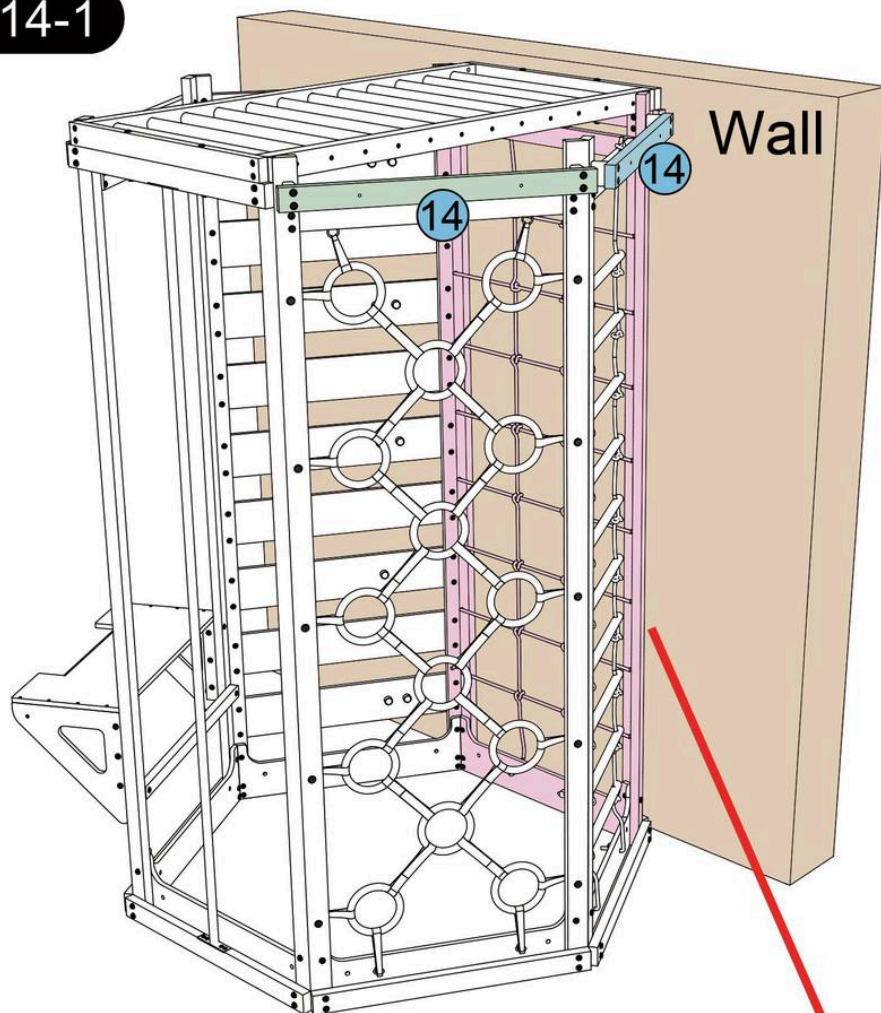

Wall

There are three sides that can be fastened to the wall with screws (N). You may choose any one side from Part (12) (pink) and the two Part (14)s (blue and green) to lean against the wall according to actual conditions.

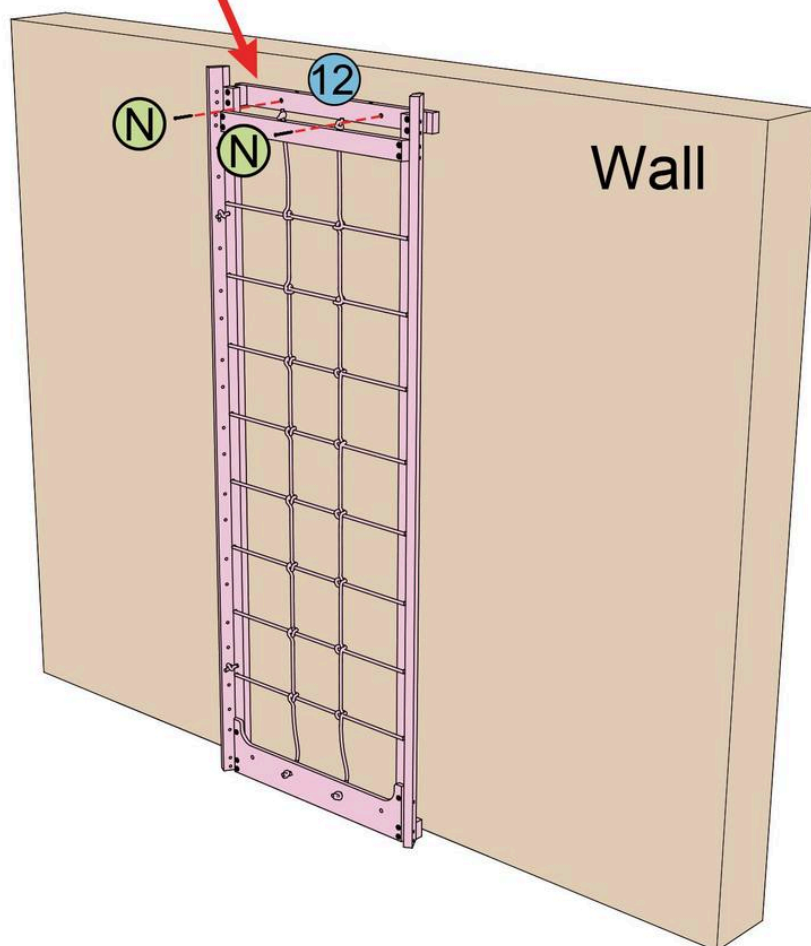

Wall

