

avenlur

Juniper by Avenlur



WARNING:
Adult assembly required.

Need Help?

CALL US AT 888.697.3931 / M-F 9AM - 5PM PT (12PM - -8PM ET)
OR EMAIL US AT INFO@AVENLUR.COM

V7

WARNING

Adult assembly required.

WARNING

Maximum user weight: 55lbs (25kg) per child.

WARNING

CHOKING HAZARD:

Adult assembly required. Keep small assembly parts out of reach of children.

 Use under adult supervision.

OBSERVE ALL STATEMENTS AND WARNINGS TO REDUCE THE LIKELIHOOD OF SERIOUS OR FATAL INJURY. SAVE THIS SHEET FOR FUTURE REFERENCE.

OPERATION INSTRUCTIONS

1. An adult should always supervise use of this product by children of all ages.
2. Instruct children not to attach items to the playground equipment that are not specifically designed for use with the equipment (examples: ropes, clothesline, pet leashes, cables and chain, etc) as they may cause a strangulation hazard or any other hazard.
3. Never allow children to use the equipment in a manner other than intended.

MAINTENANCE INSTRUCTIONS

1. Inspect the product periodically for loose or damaged components. **Tighten bolts if need.**
2. Check all connections and bolts for tightness at least twice monthly during the usage.
3. Check all coverings and bolts for sharp edges.

INSTALLATION INSTRUCTIONS

Please have an electrical drill available for assembly if possible.

If you have difficulty in installation, please contact us for help and get installation video for reference.

Please Ensure:

1. You are assembling with at least two people to ensure that all sides and parts are leveled.
2. You don't screw the parts in too hard or it will splinter the wood.
3. You follow the directions carefully.

CONTACT US BEFORE ASSEMBLY IF:

- You need assistance with assembly
- You need a replacement part due to a missing part or defective part

Call us at 888-697-3931 M-F 9AM-5PM PT

or email us at info@avenlur.com

After installation, the minimum clearance between the bottom edge of the swing seat and the floor shall be 8 in (200 mm).

At the beginning of each play season:

- Tighten all hardware.
- Check all protective coverings on bolts, pipes, edges, and corners. Replace if they are loose, cracked, or missing.
- Check all moving parts including swing seats, ropes, cables, and chains for wear, rust, or other deterioration. Replace as needed.
- Check metal parts for rust. If found, sand and repaint using a non-lead-based paint meeting the requirements of 16 CFR 1303.
- Check all wood members for deterioration and splinters. Sand down splinters and replace deteriorating wood members.

Twice a month during play season:

- Tighten all hardware.
- Check all protective coverings on bolts, pipes, edges, and corners. Replace if they are loose, cracked, or missing.

Once a month during play season:

- Check all moving parts including swing seats, ropes, cables, and chains for wear, rust, or other deterioration. Replace as needed.
- Owners shall be responsible for maintaining the legibility of the warning labels.


Disposal Instructions:

- When the swing use is no longer desired, it should be disassembled and disposed of in such a way that no unreasonable hazards will exist at the time the unit is discarded.


This swing includes a safety restraint system. The restraint system must be fastened and used every time a child occupies the seat.

Max Fall Height: 8 in (200 mm)


- Max Users: 1 child (One at a time only),
- Instruct children not to walk close to, in front of, behind, or between moving items,
- Instruct children not to twist swing chains or ropes or loop them over the top support bar since this may reduce the strength of the chain or rope,
- Instruct children to avoid swinging empty seats,
- Teach children to sit in the center of the swings with their full weight on the seats,
- Instruct children not to get off equipment while it is in motion,
- Don't allow children to wear inappropriate items, such as but not limited to, loose fitting clothing, hood and neck drawstrings, scarves, cord-connected items, capes and ponchos. These items can cause death by strangulation.
- Never add extra length to chain or rope. The chains or ropes provided are the maximum length designed for the swinging element(s).




① ×1




② ×1




③ ×1



④ ×1




⑤ ×1




⑥ ×1




⑦ ×2 45.5in



⑬ ×1 45.5in

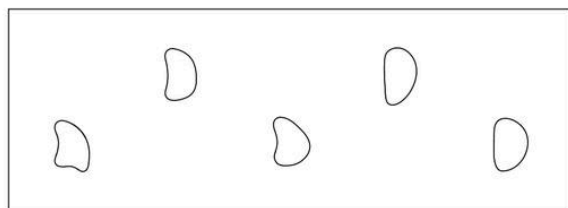


⑧ ×1 43.5in



⑭ ×1 45.5in




⑮ ×2 44.0in



⑨ ×1 45.5in



⑯ ×1 18.0in




⑩ ×1 45.5in




⑰ ×6 18.0in




⑱ ×1 23.5in




⑪ ×1 45.5in



⑲ ×1



⑳ ×1




⑫ ×1 45.5in



⑳ ×2 42.5in



㉒ ×1 24.5in



M4×30
A ×2




M7×50
B ×28




M6×30 M6×20
C ×2



M6×40 M6×20
D ×6



M6×40 M6×20
E ×10





M6×50 M6×13
F ×2




4mm
G ×2


01-1


Ensure that the protruding end of part 17 matches the insert and hole of part 14. Insert and screw in.

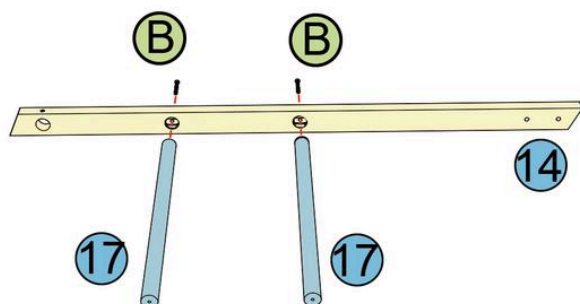


(B)		2
(G)		2


01-2

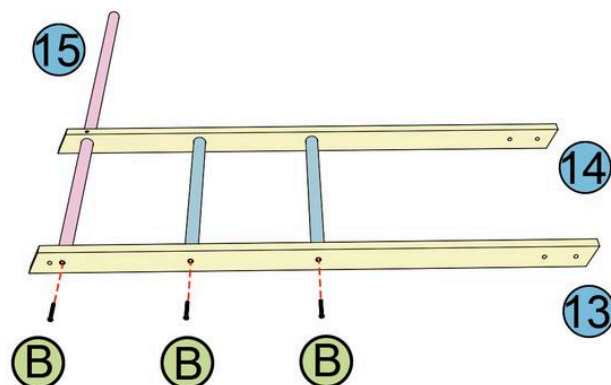

(B)		3
-----	---	---


01-3

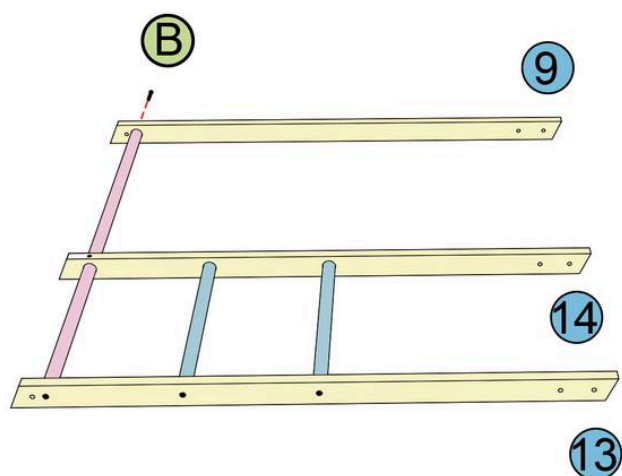


(B)		1
-----	---	---

01-4



Screw in (A) screw, only after you have already tightened all the (B) screws.

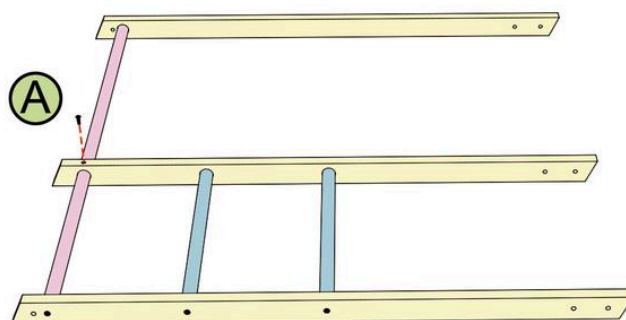


(A)		1
-----	--	---

02-1


Ensure that the protruding end of part 17 matches the insert and hole of part 11. Insert and screw in.

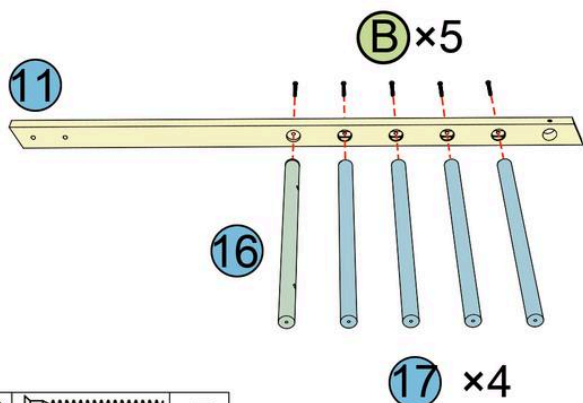

02-2

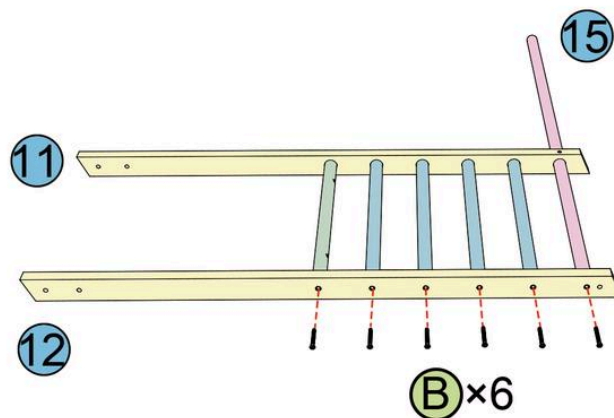



02-3

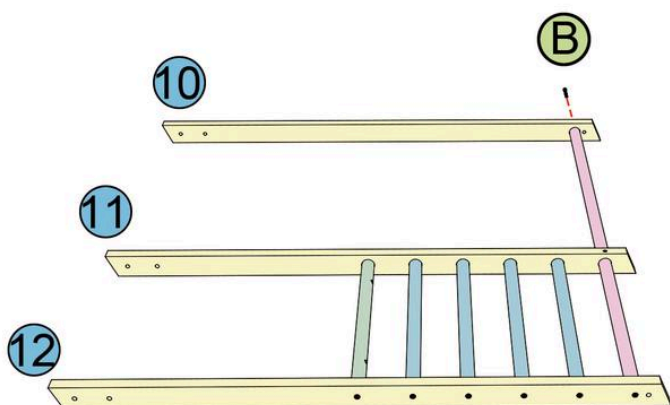



02-4



Screw in (A) screw, only after you have already tightened all the (B) screws.

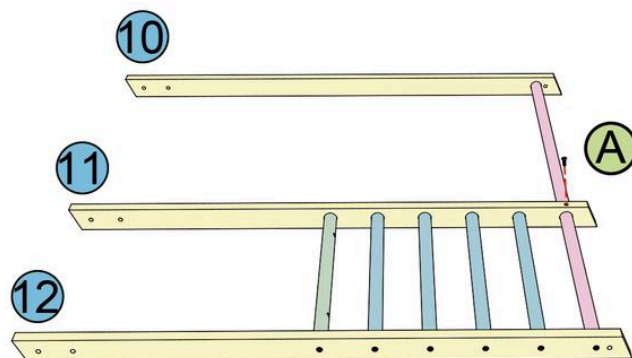

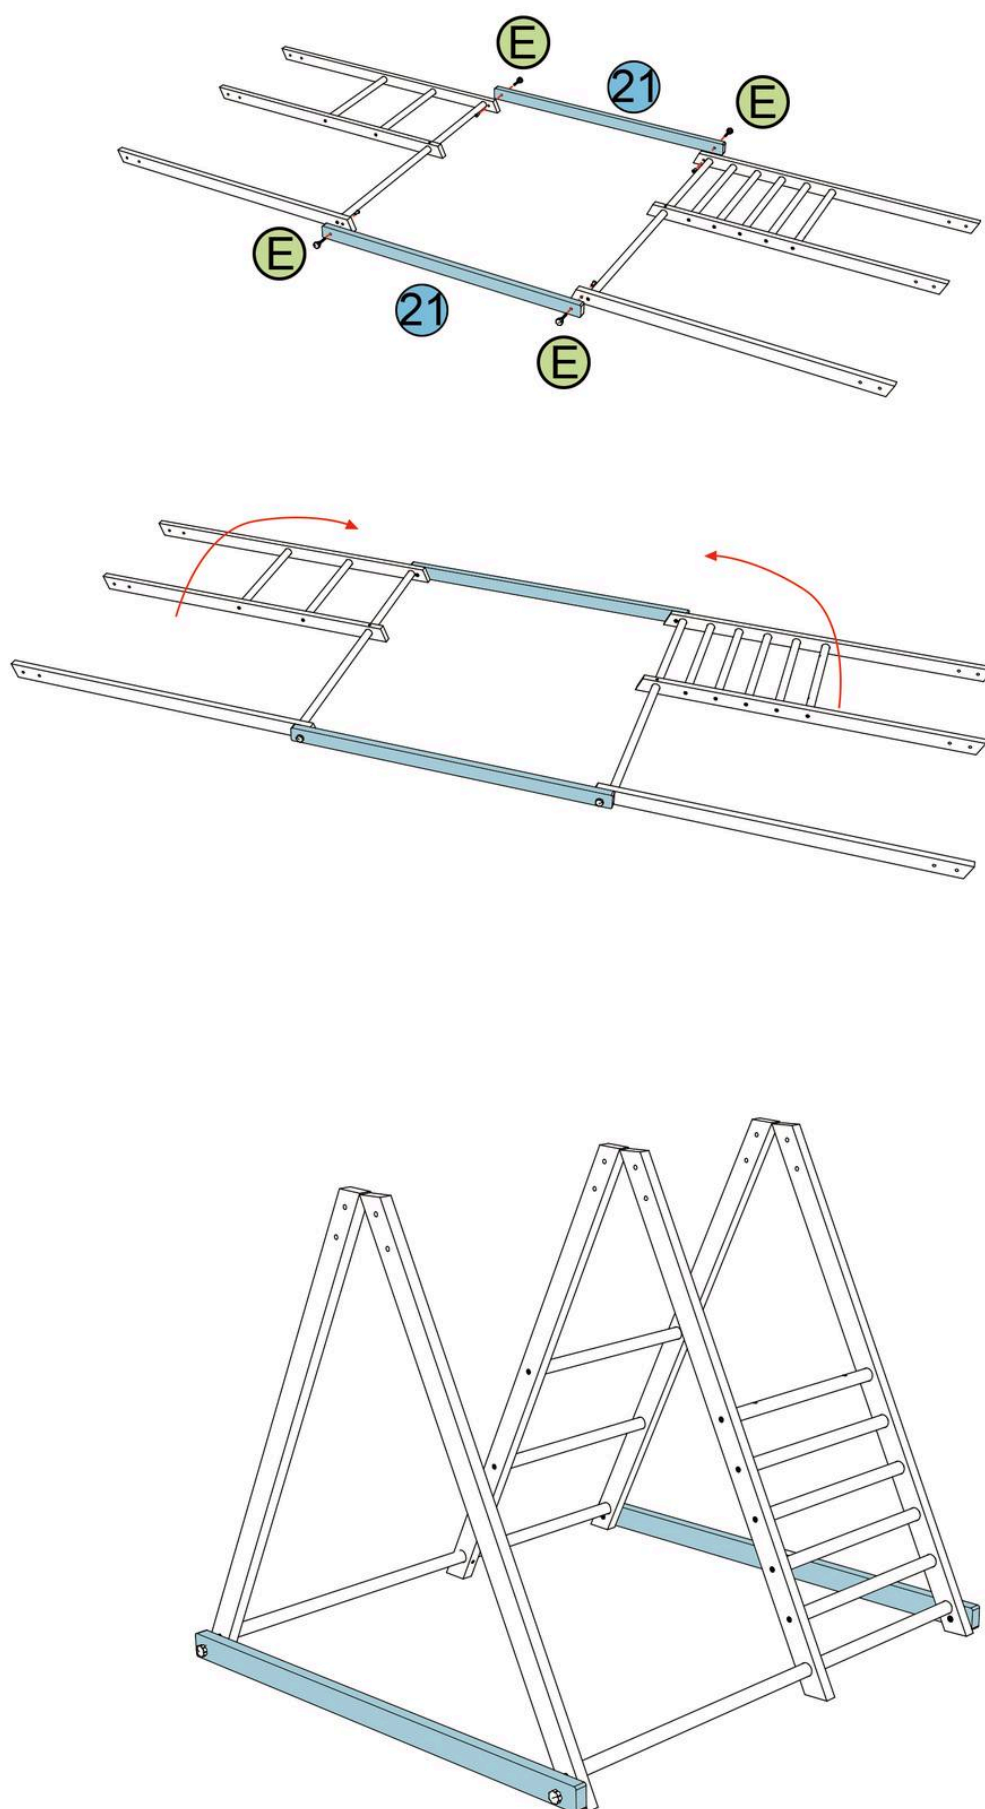



04-1

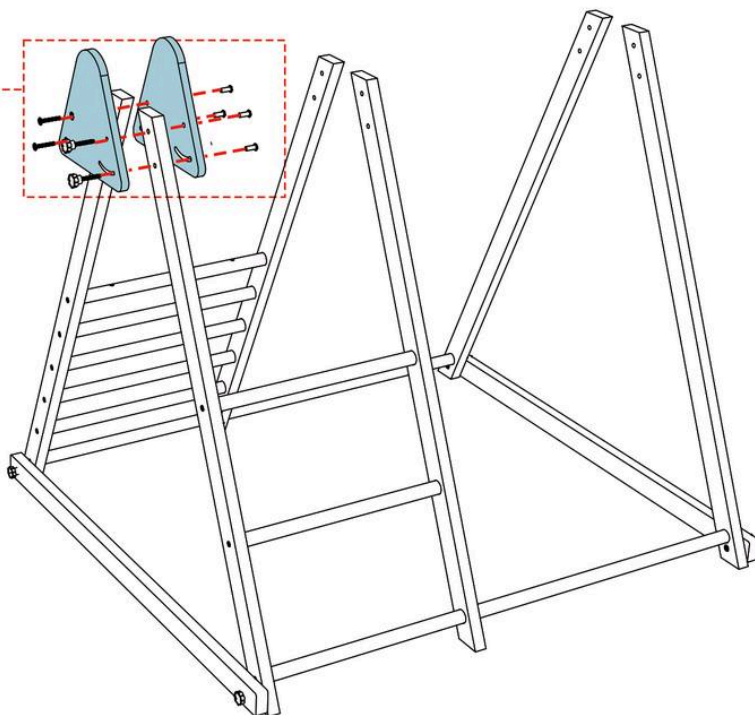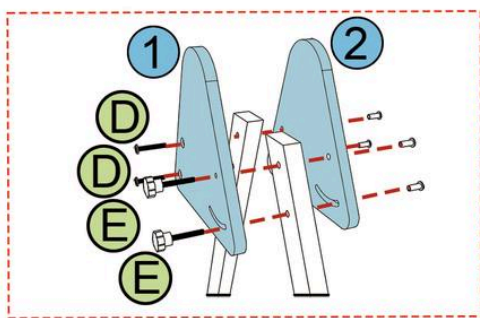


D		2
E		2


04-2



1. Insert the connector into the hole, making sure the crosshairs face outward.
2. Hold the connector steady with the Phillips screwdriver side of the tool.
3. Using the hex side of the other tool part, screw the bolt into the connector until it is secure.

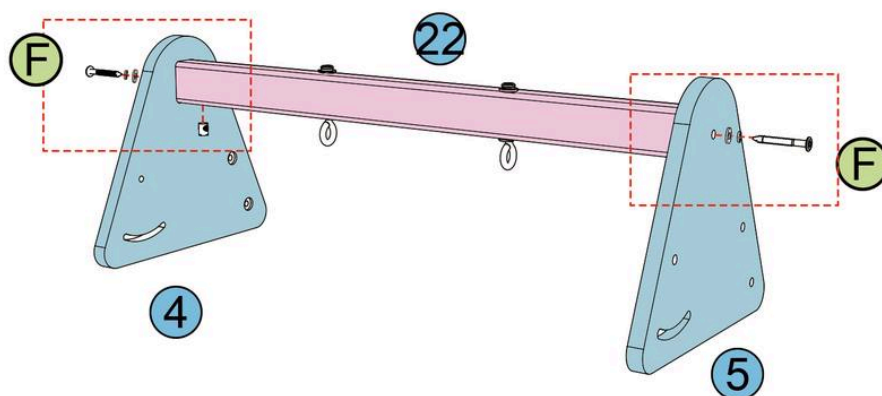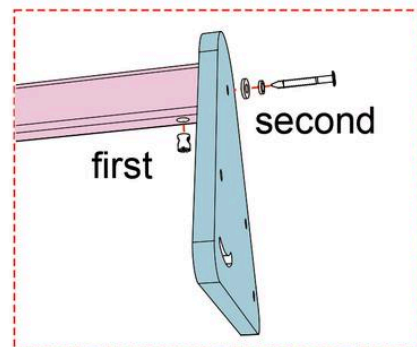

F		2
----------	---	---


04-3

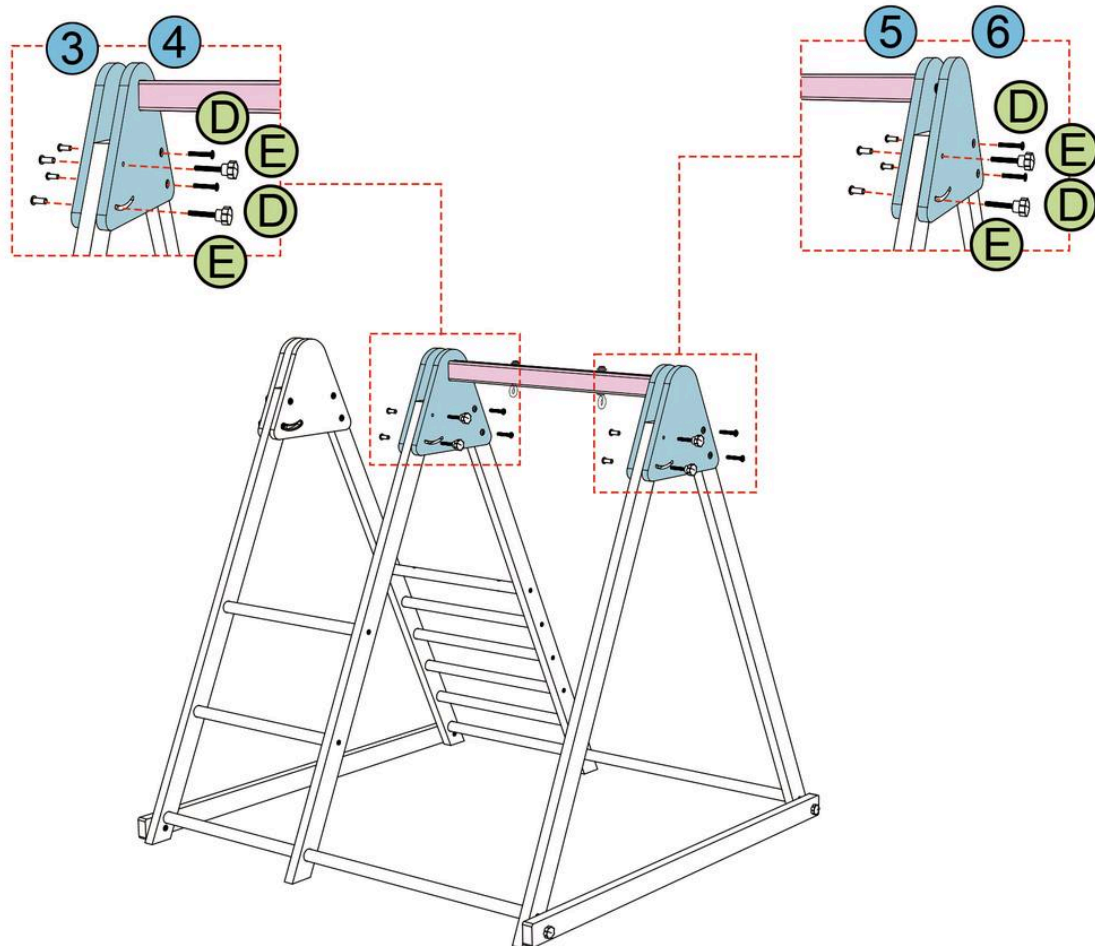


D		4
E		4

05-1




After rotating the hole of Part **16** to a vertical position, tighten screws **C**

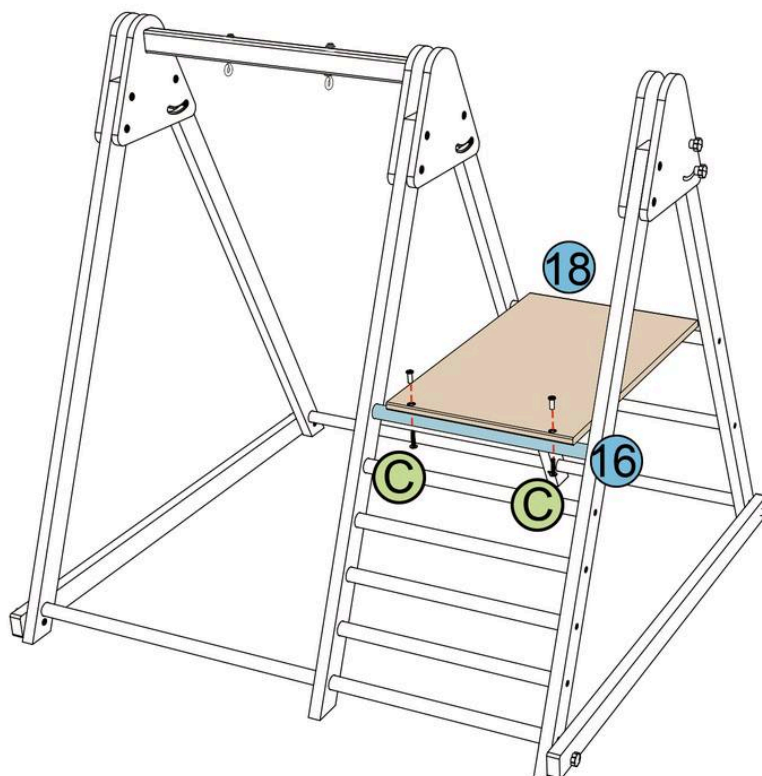



C		2
----------	---	---





Need help? Scan the
QR code to watch the
instructional video.

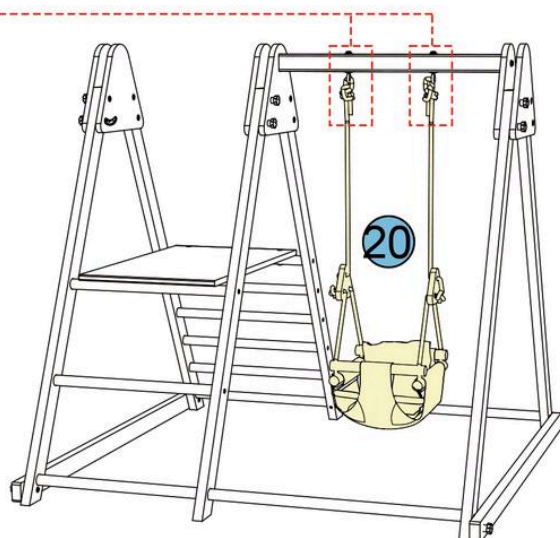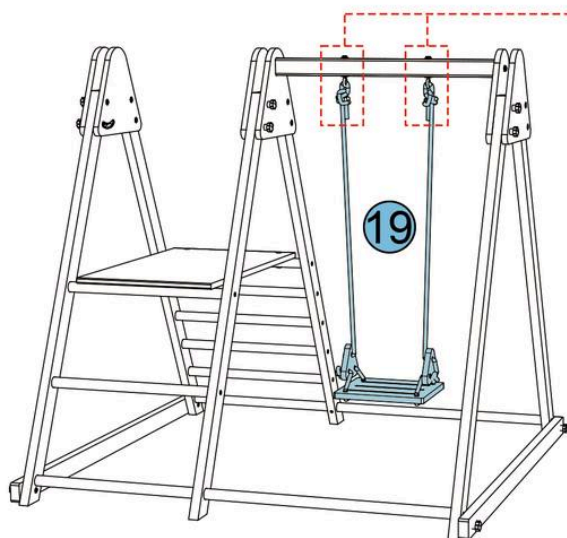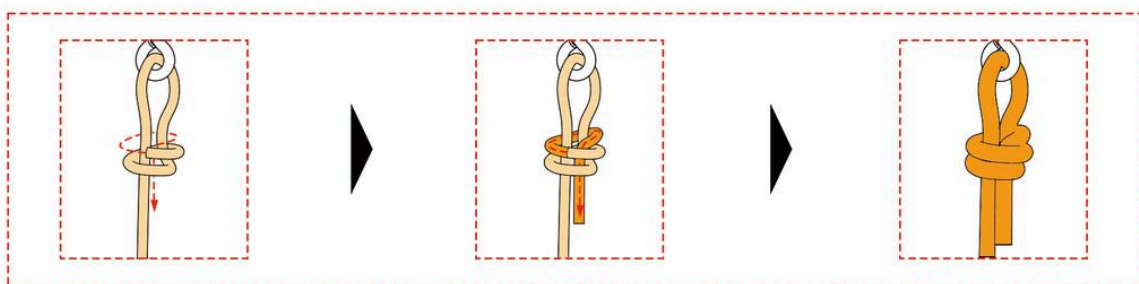

07-1

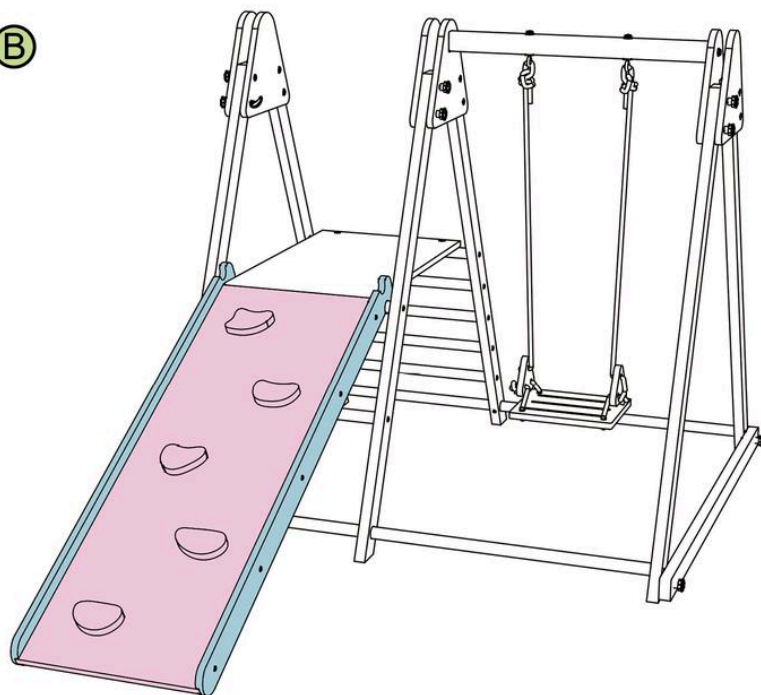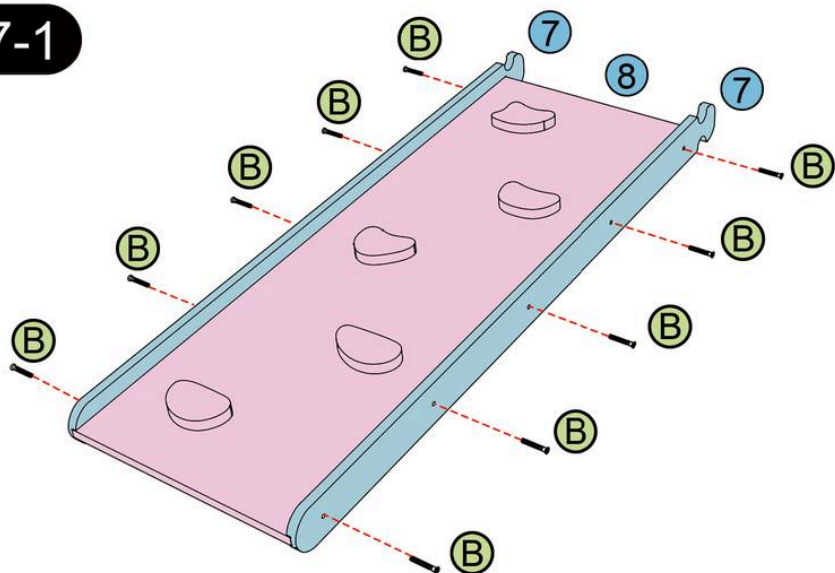

07-2

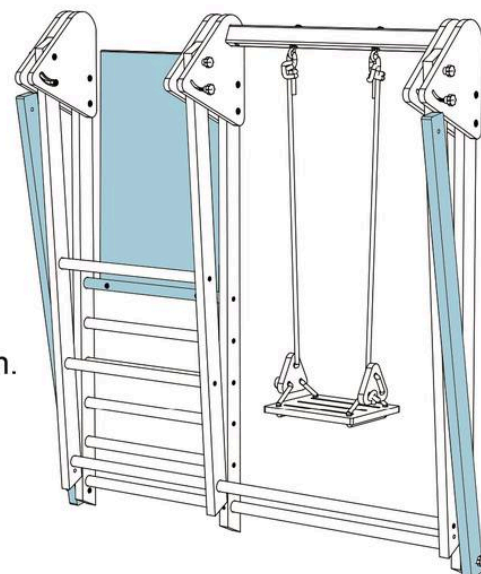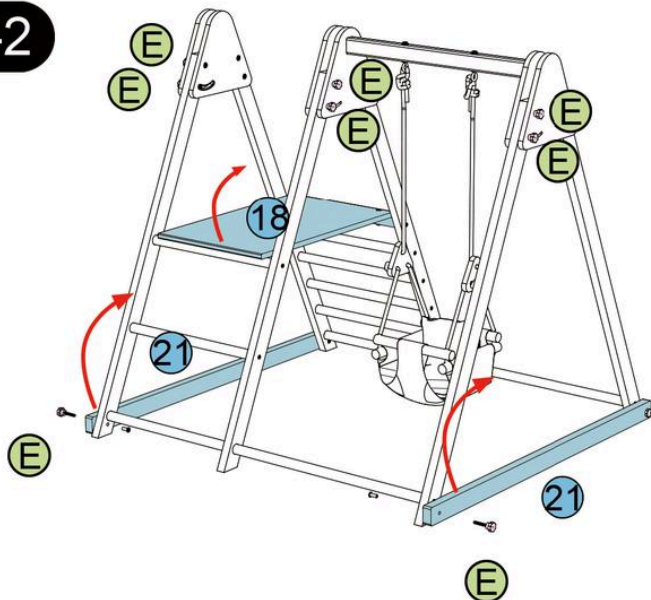

Note:

1. Remove ramp/slide.
2. Remove the two Screws **E** that connect to Part **21** by hand as shown.
3. Loosen the six remaining Screws **E** by hand as shown.
4. Fold up the two beams **21** and the platform **18** to fold the set.

