

avenlur

Magnolia by Avenlur



Medium



Need Help?

CALL US AT 888.697.3931 / M-F 9AM - 5PM PT (12PM - -8PM ET)

OR EMAIL US AT INFO@AVENLUR.COM

V4

WARNING

Adult assembly required.

WARNING

Maximum user weight: 110 lbs (50kg) per child.

WARNING

CHOKING HAZARD:

Adult assembly required. Keep small assembly parts out of reach of children.

 Use under adult supervision.

OBSERVE ALL STATEMENTS AND WARNINGS TO REDUCE THE LIKELIHOOD OF SERIOUS OR FATAL INJURY. SAVE THIS SHEET FOR FUTURE REFERENCE.

OPERATION INSTRUCTIONS

1. An adult should always supervise use of this product by children of all ages.
2. Instruct children not to attach items to the playground equipment that are not specifically designed for use with the equipment (examples: ropes, clothesline, pet leashes, cables and chain, etc) as they may cause a strangulation hazard or any other hazard.
3. Never allow children to use the equipment in a manner other than intended.

MAINTENANCE INSTRUCTIONS

1. Inspect the product periodically for loose or damaged components. **Tighten bolts if need.**
2. Check all connections and bolts for tightness at least twice monthly during the usage.
3. Check all coverings and bolts for sharp edges.

INSTALLATION INSTRUCTIONS

Please have an electrical drill available for assembly if possible.

If you have difficulty in installation, please contact us for help and get installation video for reference.

Please Ensure:


1. You are assembling with at least two people to ensure that all sides and parts are leveled.
2. You don't screw the parts in too hard or it will splinter the wood.
3. You follow the directions carefully.

CONTACT US BEFORE ASSEMBLY IF:


- You need assistance with assembly
- You need a replacement part due to a missing part or defective part

Call us at 888-697-3931 M-F 9AM-5PM PT


or email us at info@avenlur.com



① ×1 47.0in



② ×1 48.0in



③ ×1 48.0in



④ ×1 47.0in




⑤ ×2 33.5in




⑥ ×11 14.5in




⑦ ×4 48.0in



⑧ ×1 47.0in



⑨ ×1 48.0in



⑩ ×1 48.0in



⑭ ×1 47.0in



⑪ ×2 14.5in




⑬ ×11 15.0in




⑫ ×1 49.5in




⑮ ×2 42.5in

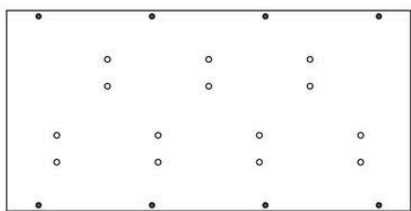


⑯ ×1 31.5in




⑰ ×1




⑱ ×1



⑲ ×7



⑳ ×1 185.0in



㉑ ×1 47.0in



㉒ ×2 19.0in



㉓ ×2 90.5in



㉔ ×1 49.5in



M4×30
① ×10



M4×40
② ×12



M7×50
③ ×64



M6×30 M6×20
④ ×8



M6×40 M6×20
⑤ ×4



M6×50 M6×13
⑥ ×4



M10×35
⑦ ×14



⑧ ×14



4MM
⑨ ×2





8MM
⑩ ×1




17MM
⑪ ×1

01-1


Ensure the protruding ends of Part 6 and Part 22 match the holes in Part 2 then insert and tighten.

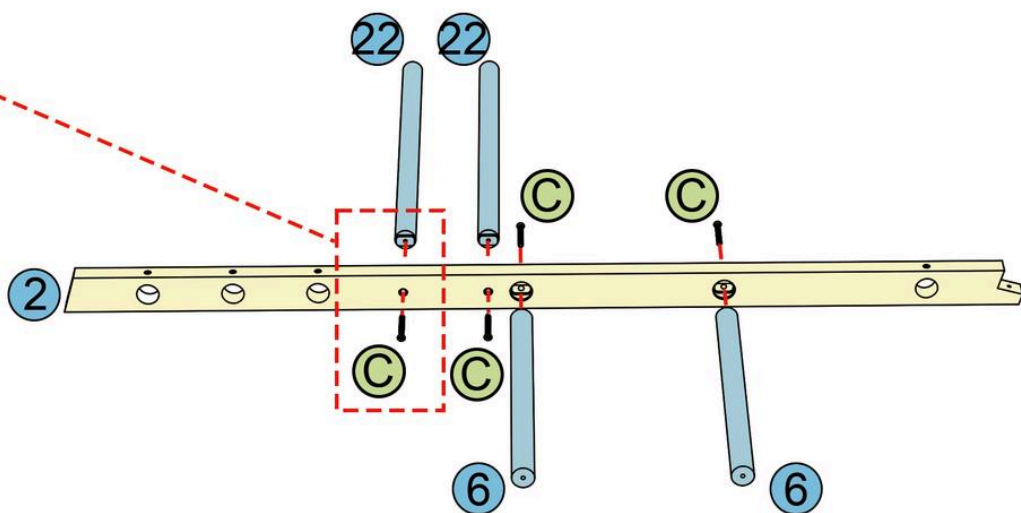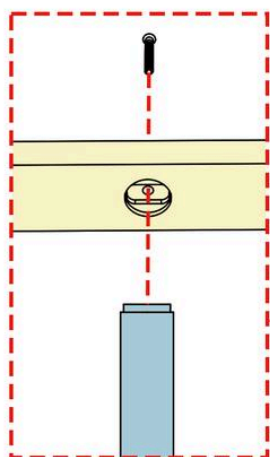


01-2

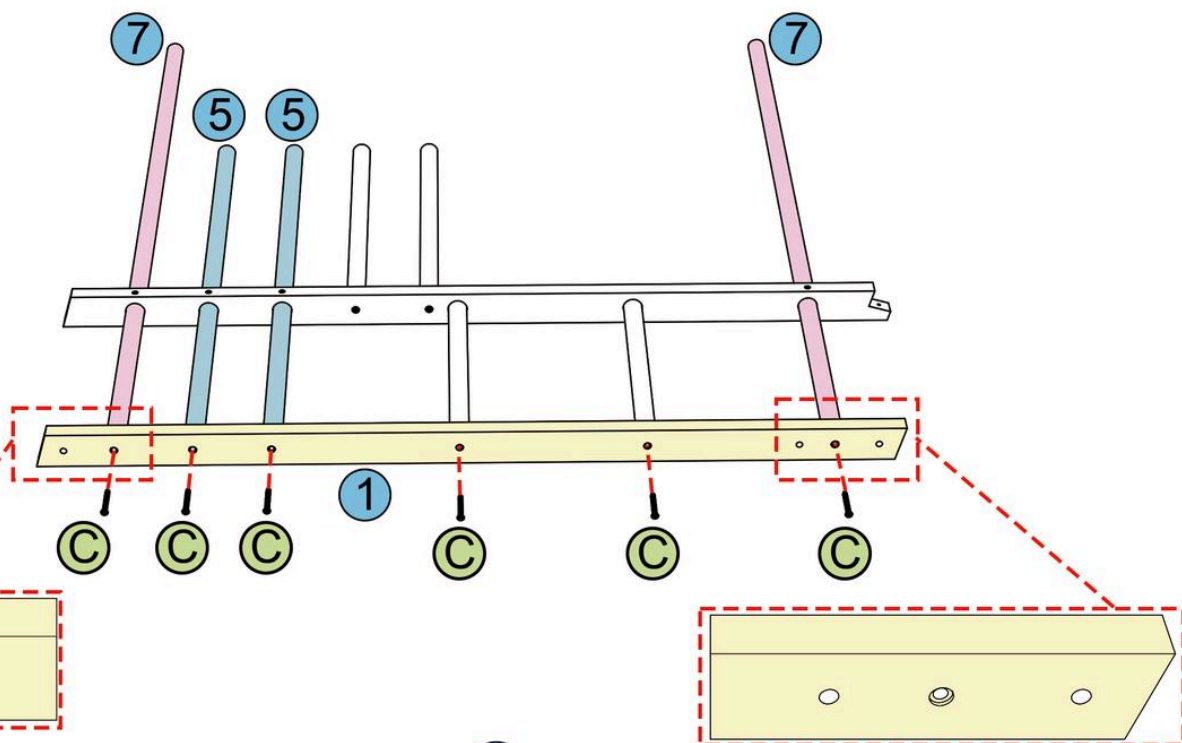


Note: The hole positions of Part 1 must be consistent as shown.




02-1

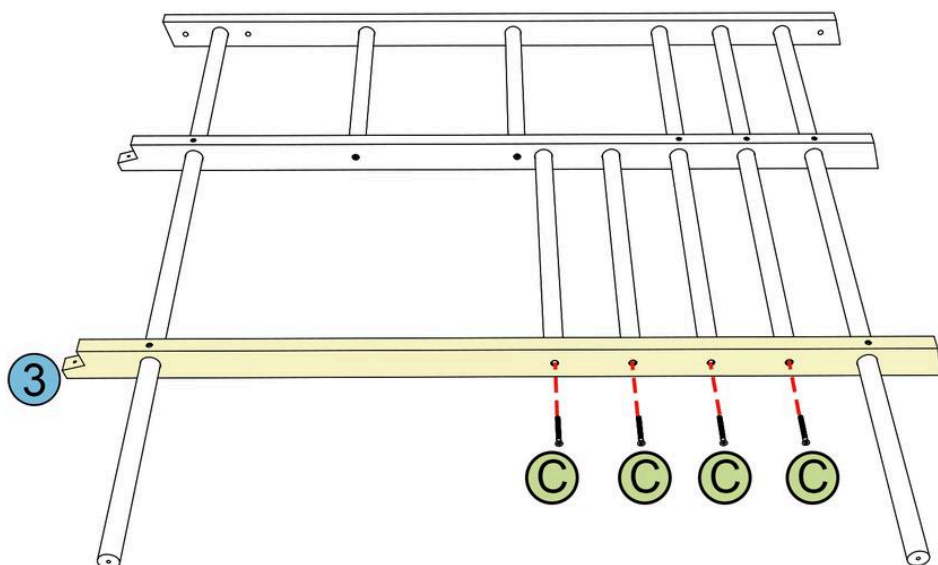


(C)		4
	M7×50	

02-2

Tighten all screws **(C)** first, and then tighten the screws **(A)**.

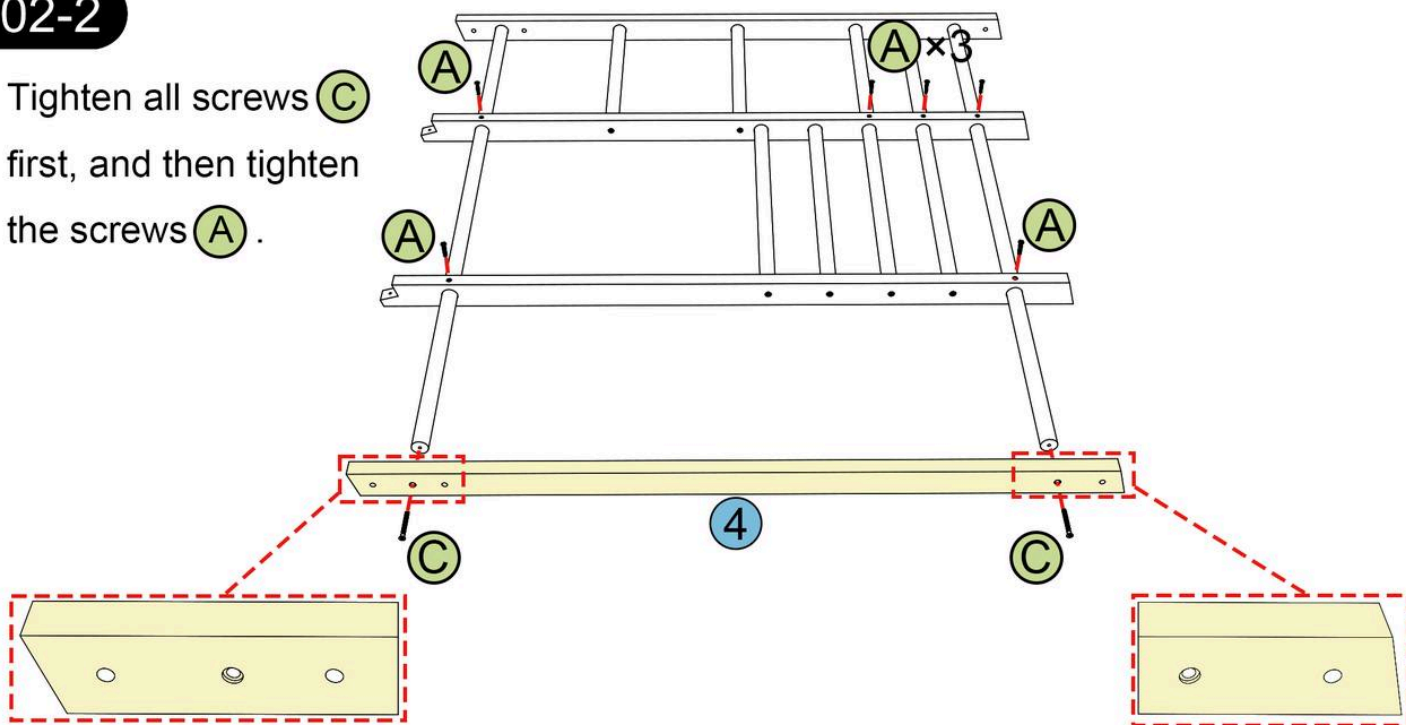


Note: The hole positions of Part **(4)** must be consistent as shown.


(A)		6
	M4×30	
(C)		2
	M7×50	

03-1


Ensure that the protruding end of part 6 matches the insert and hole of part 10. Insert and screw in.

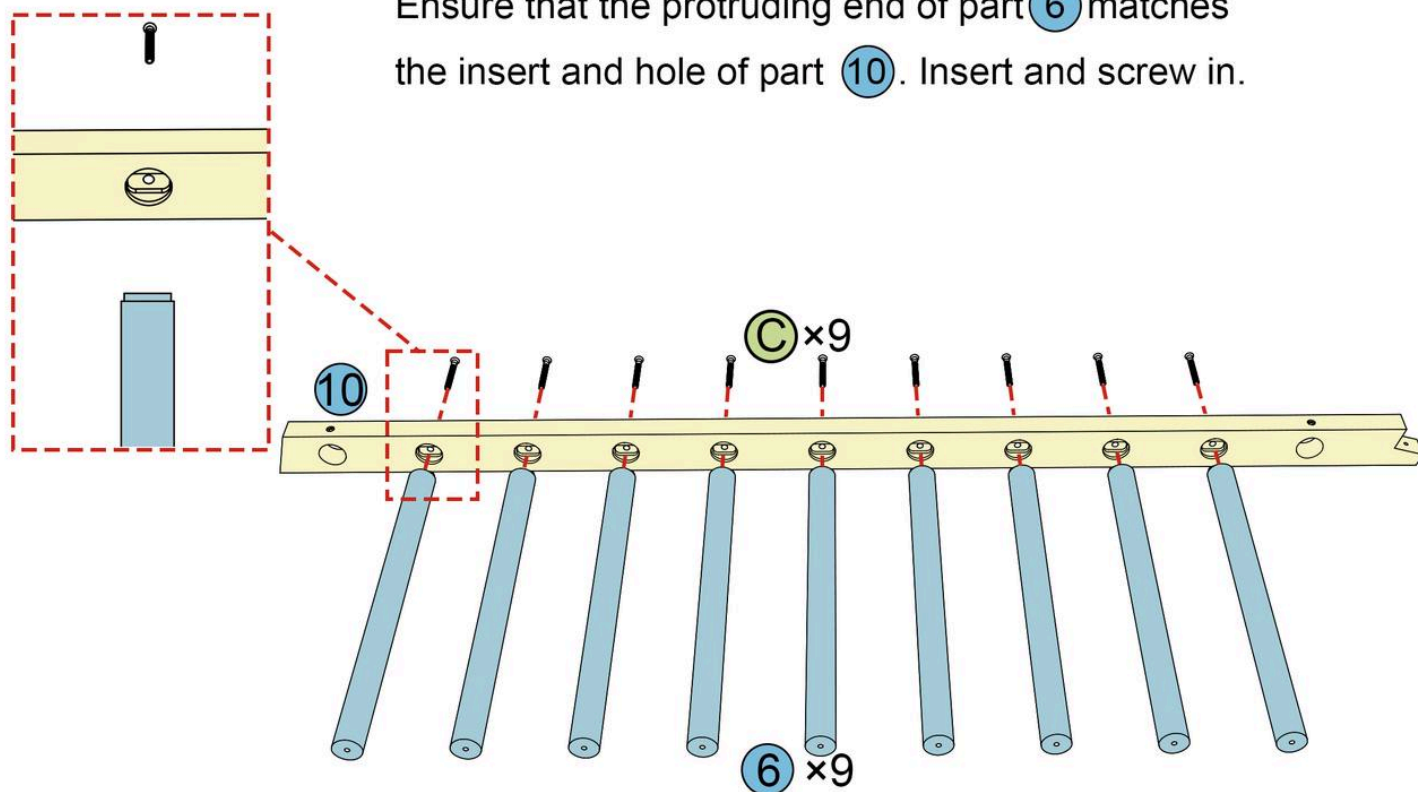


03-2

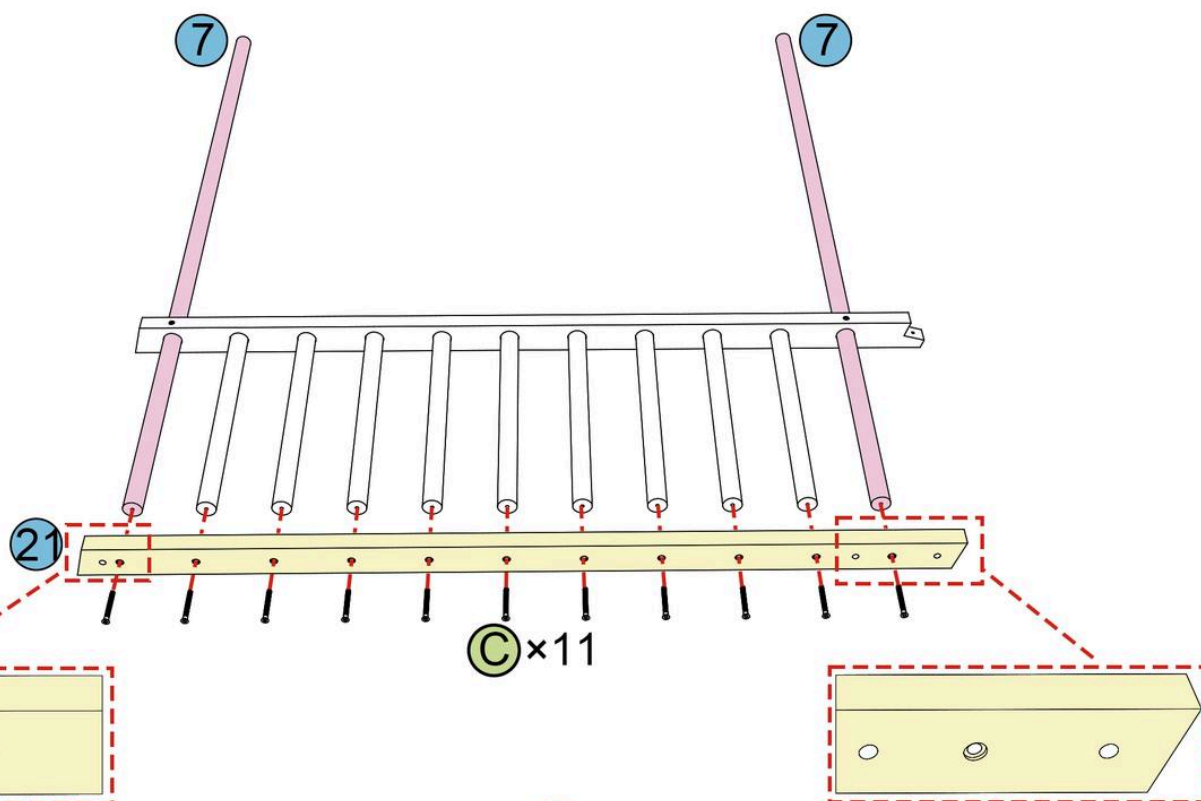

Note: The hole positions of Part 21 must be consistent as shown.




04-1



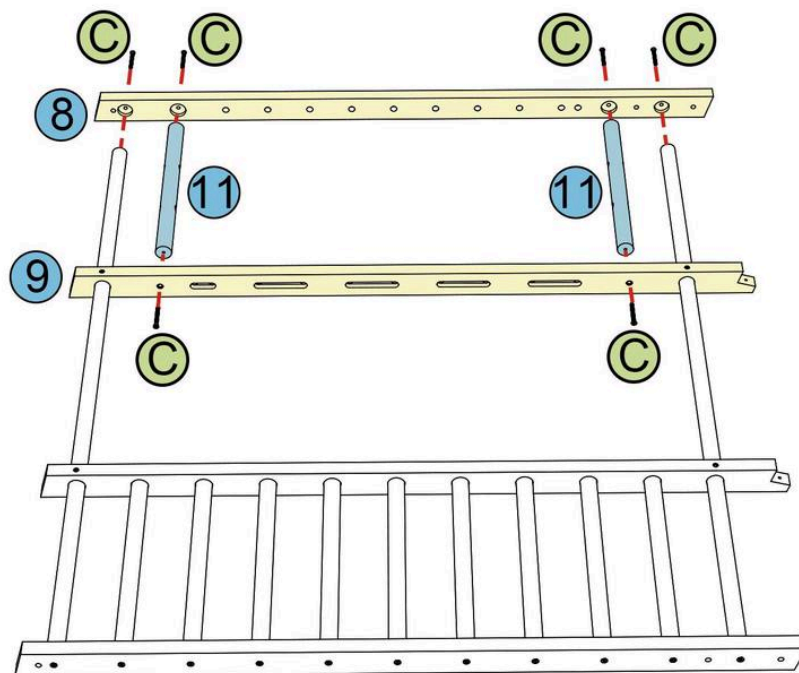


You need to thread Part 9 through first,
and then install others.






04-2

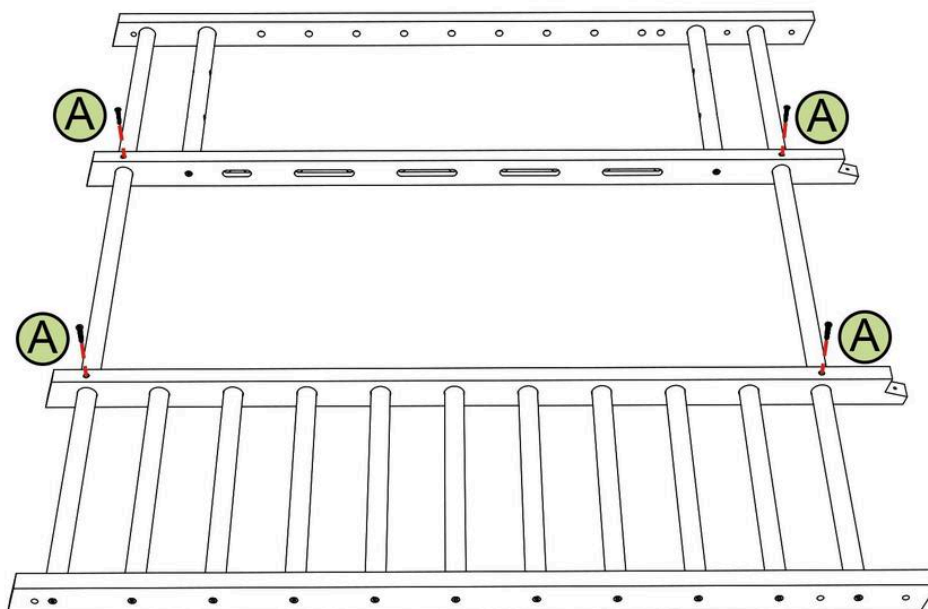

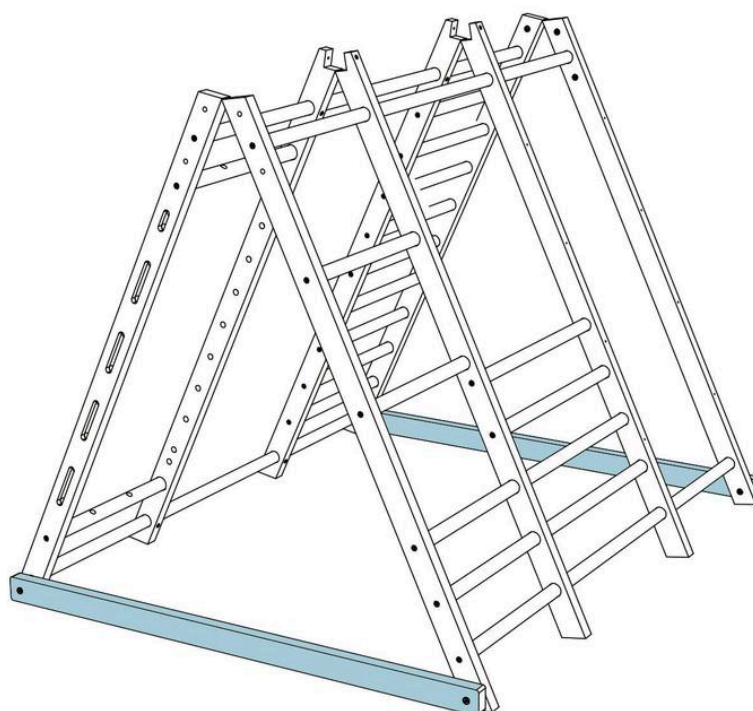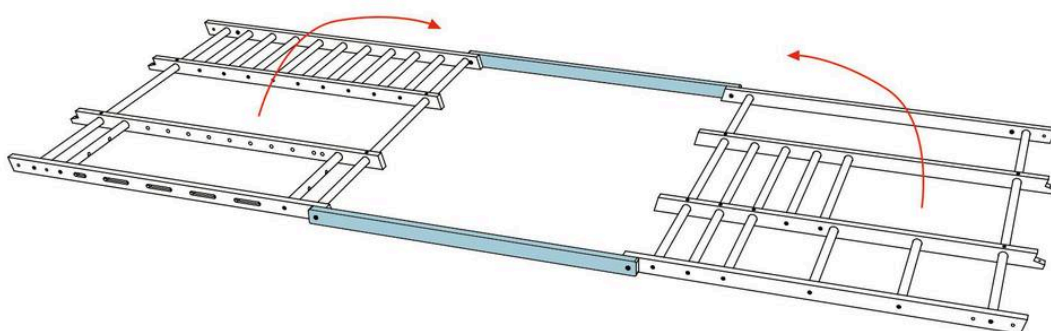
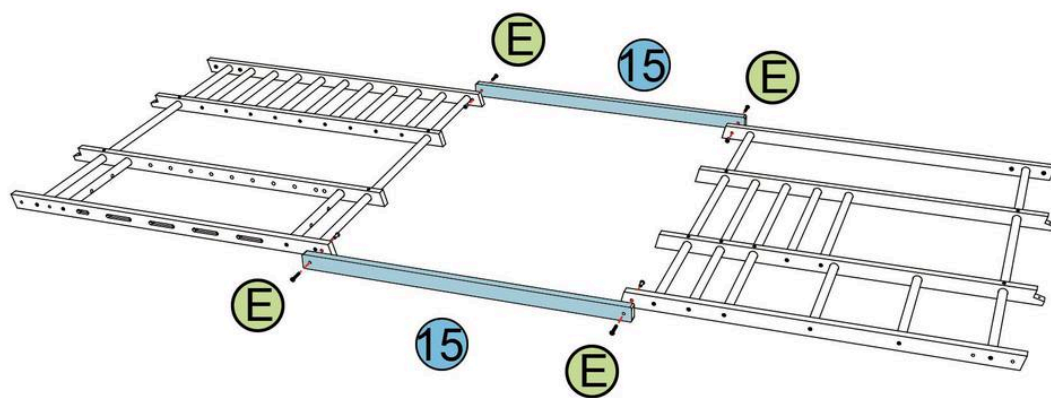


06-1



When assembling Part 17, if the holes do not align, first loosen the two screws on Part 15, then align the holes.

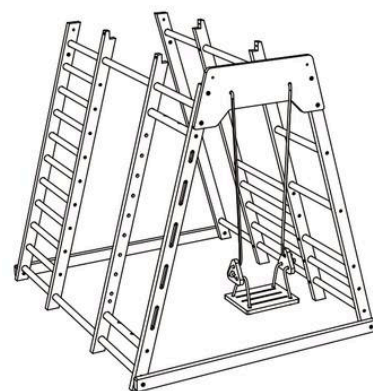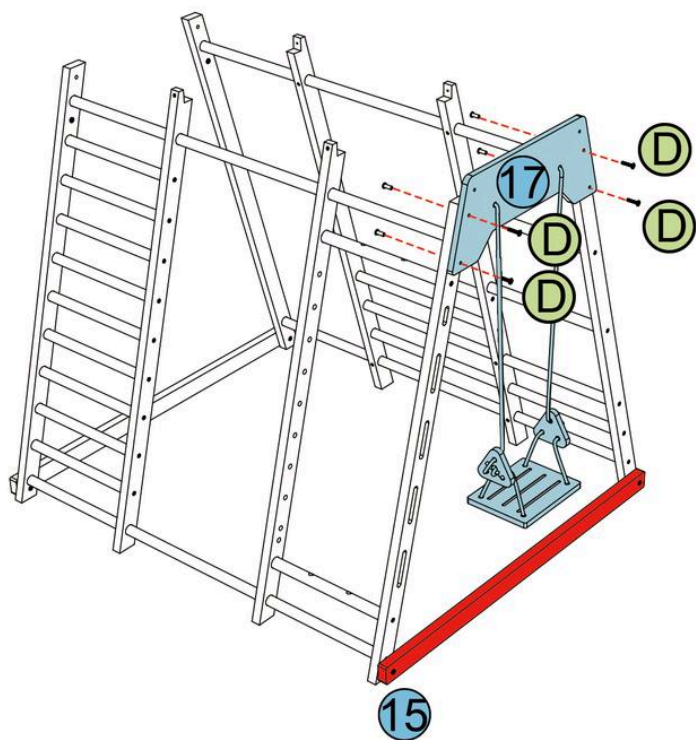


06-2

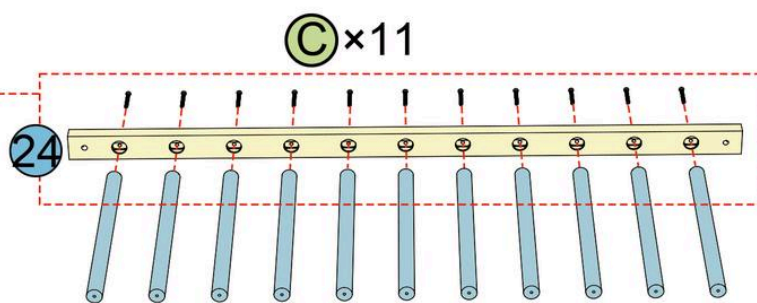


Ensure that the protruding end of part 13 matches the insert and hole of part 24. Insert and screw in.

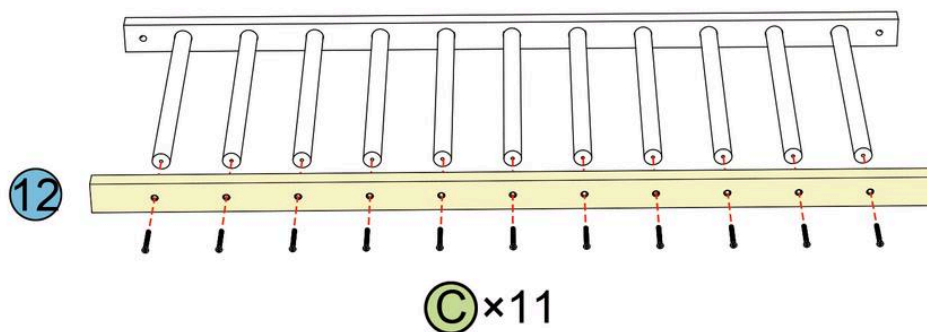


07-1

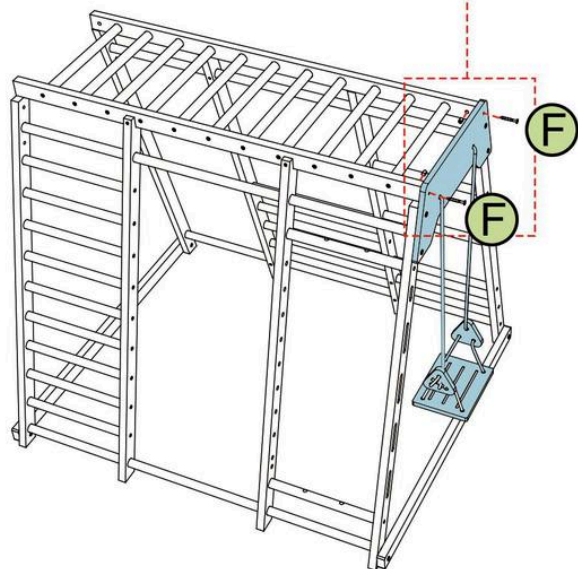


1. Insert the connector into the hole, making sure the crosshairs face outward.
2. Hold the connector steady with the Phillips screwdriver side of the tool.
3. Using the hex side of the other tool part, screw the bolt into the connector until it is secure.

F		2
M6×50 M6×13		



07-2

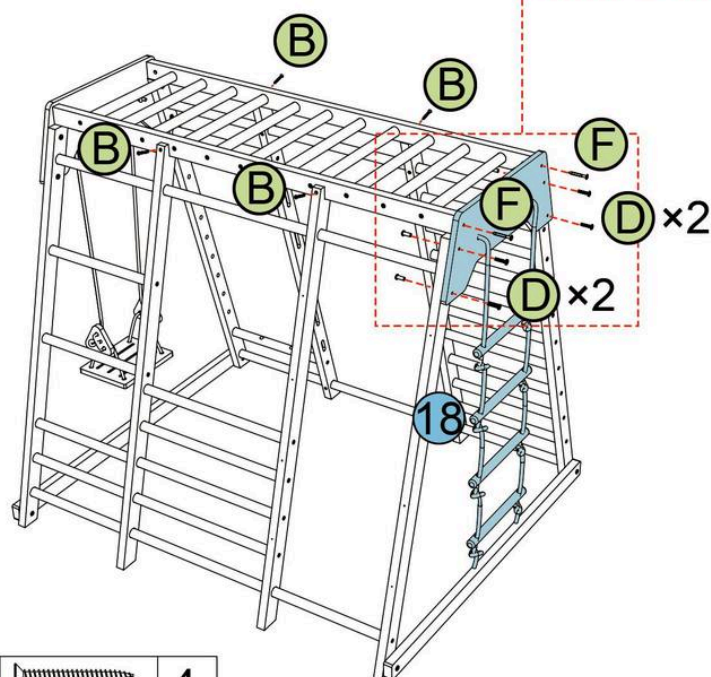


1. Insert the connector into the hole, making sure the crosshairs face outward.
2. Hold the connector steady with the Phillips screwdriver side of the tool.
3. Using the hex side of the other tool part, screw the bolt into the connector until it is secure.

B		4
M4×40		
D		4
M6×30 M6×20		
F		2
M6×50 M6×13		


Install all screws **D** and **F** first, and then install screws **B**.

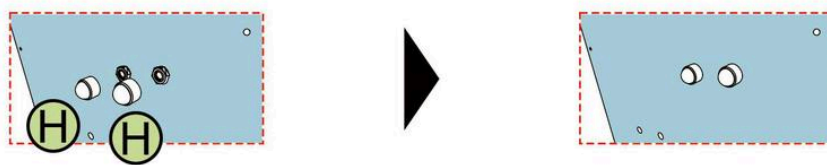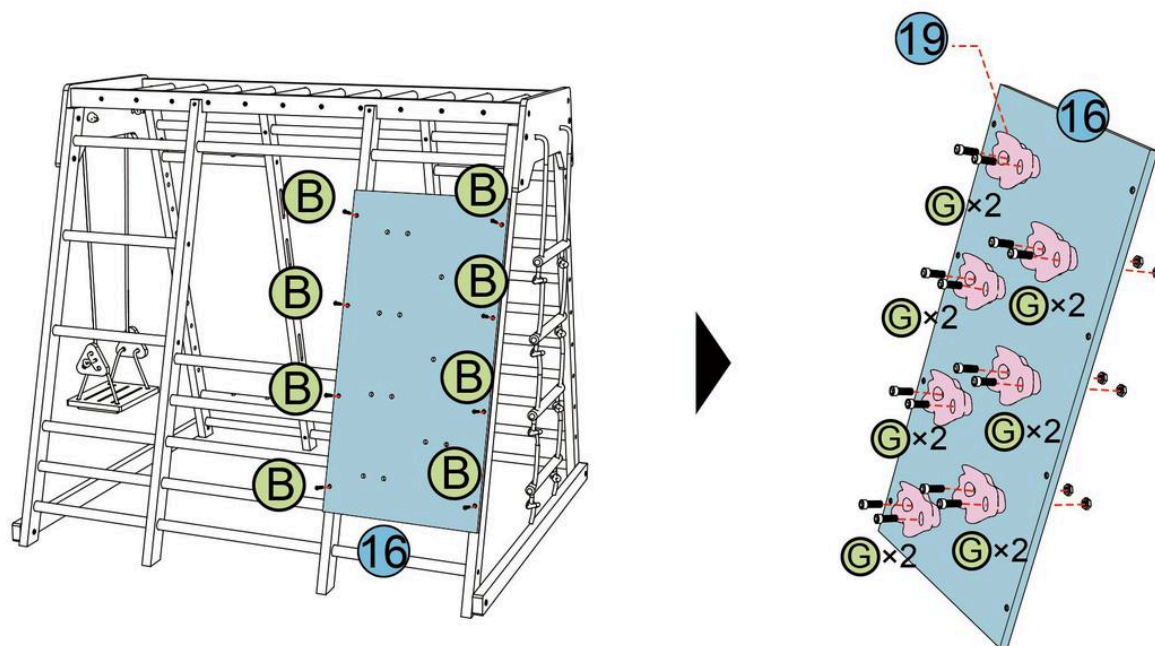



After the above installation steps are completed, you need to install Part (H) onto the screws (G) as shown.

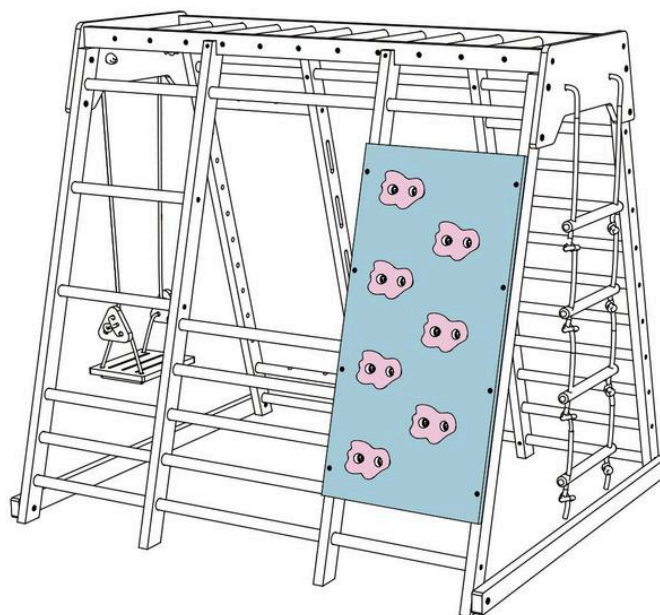


(B)	 M4×40	8
(G)	 M10×35	14
(H)		14

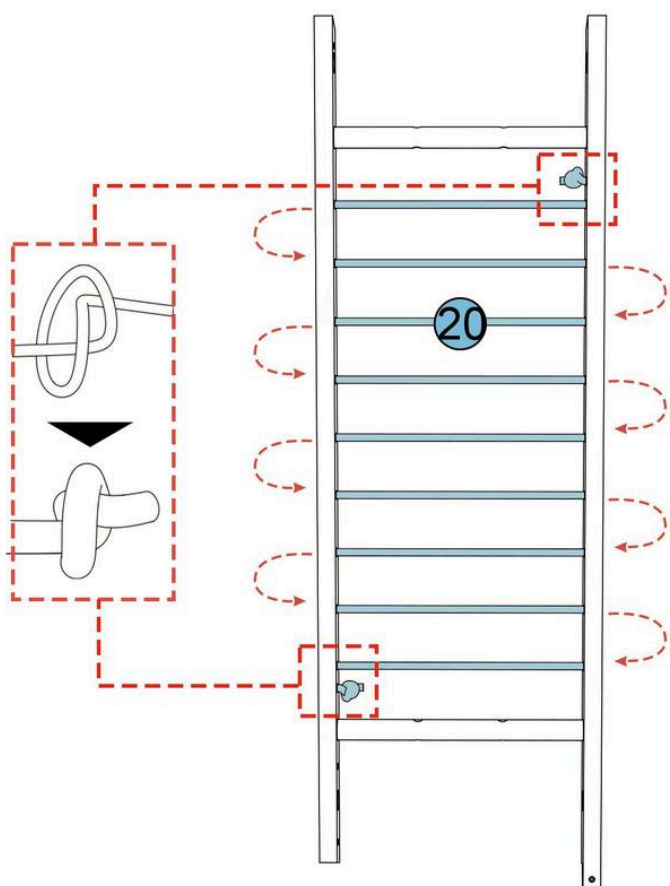

Need help? Scan the QR code
to watch the instructional video

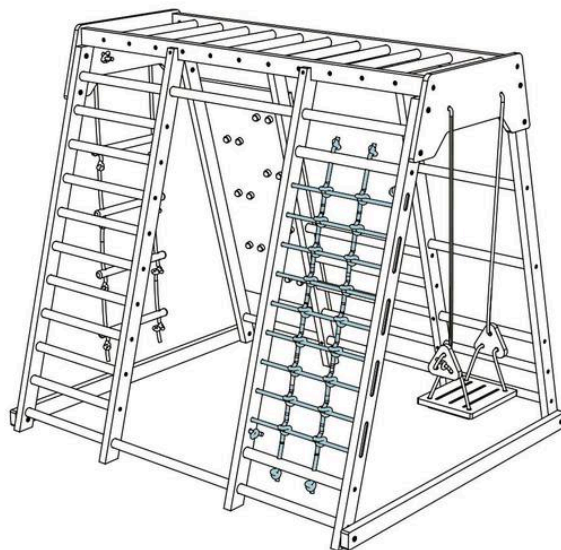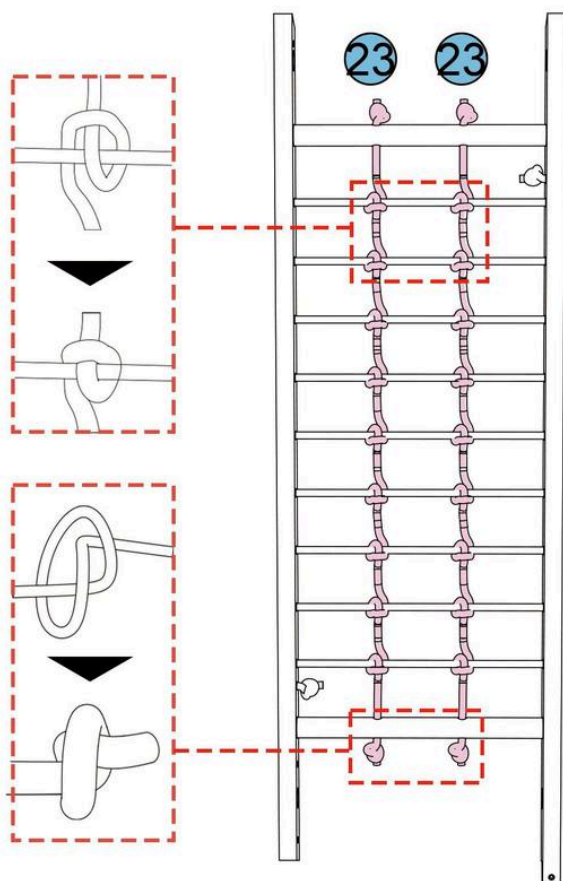

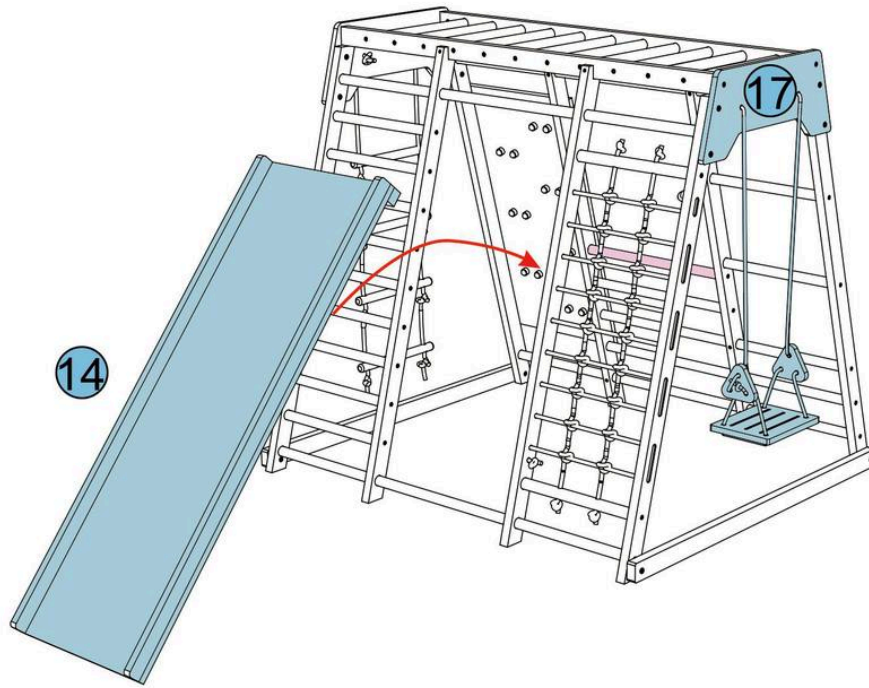

Important Note:

Parts 14 and 17 are not designed to be used together. Only one of these parts should be installed or operated at a time. Using more than one simultaneously may result in malfunction, damage to the device, or safety hazards.

If children are on the swing, move the slide away to create more space.

